

November 2008

Direct Applied Finishes

Section: 07240



DEFS Channel Reveal

Product Number	Dimension A	Dimension B	Pieces Per Box
2225	1/2" (13 mm)	Designed for 1/2" (13 mm) or 5/8" (16 mm) sheathing applications.	30
2226	1" (25 mm)		35
2227	3/4" (19 mm)		35
2228	3/8" (10 mm)		30
2229	5/8" (16 mm)		35
2235	1-1/2" (38 mm)	Large and small holes in hole pattern on flange.	30
2236	2" (51 mm)		30
2237	3" (76 mm)	No holes in flange.	20
2239	4" (102 mm)	No holes in flange.	20

10' (3 m) Lengths

Application:

Designed for DEFS systems. Perforated flanges are placed on top of separated sheets of sheathing board with "U" channel in separated channel. Has built-in stops to assure proper thickness of base and finish.

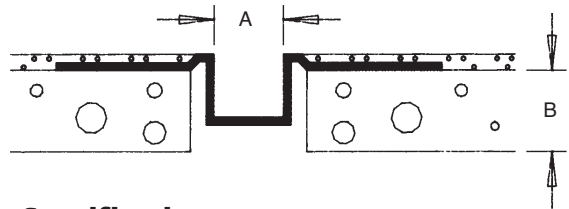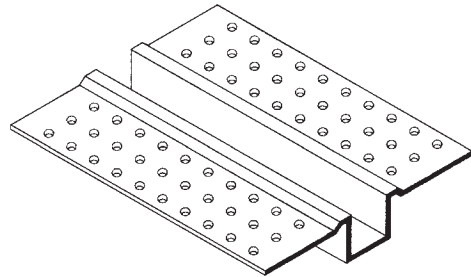


Specification:

Exterior Channel Reveal shall be Plastic Components, Inc. # _____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. They shall be used where specified by the architect and installed per industry standards.

Break Reveal/Control Joint

Product Number	Dimensions/Description	Pieces Per Box
1552	Overall width 2-1/4" (57 mm) 1/4" reveal width by 1/8" ground (6 mm x 3 mm)	50
1553	Overall width 2-1/4" (57 mm) 1/2" reveal width by 1/8" ground (13 mm x 3 mm)	50
1554	Overall width 2-1/4" (57 mm) 3/4" reveal width by 1/8" ground (19 mm x 3 mm)	50
1556	Overall width 5-1/8" (130 mm) Wider flange break reveal used in the tilt wall market to cover joints. 3/8" reveal width by 1/8" ground (10 mm x 3 mm)	50

NEW Sizes!

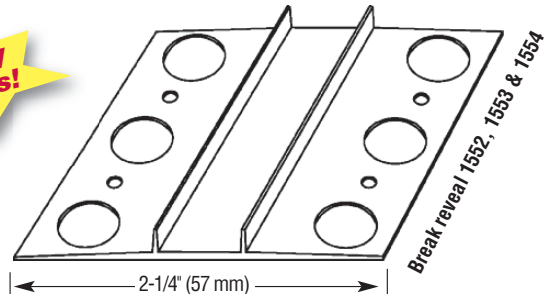

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

Caulk all butt joints, intersections and ends.

Application:

Can be used as a reveal/control joint on surface area coating applications.



PLASTIC PC[™]
COMPONENTS inc.

info@ebuildingproducts.com

855-832-8453