

November 2008

Drywall Accessories

Section: 09260

Bullnose Corner Bead

Product Number	Dimensions/Descriptions	Pieces Per Box
208	5/8" (16 mm) flange, 3/4" (19 mm) radius.	50
208H	1" (25 mm) flange, 3/4" (19 mm) radius.	50
208HI	1" (25 mm) offset flange, 3/4" (19 mm) radius.	50

8' & 10' (2.5 & 3 m) Lengths

Application: 208

Used where smooth rounded corners are specified. Will not dent or rust. Excellent paint and drywall mud adhesion. Flange is 5/8" (16 mm) wide.

Application: 208H





Same features as regular 208, except mudding flange is a full 1" (25 mm) wide. Shallow shoulder eliminates heavy build-up of topping.

Application: 208HI

Dual purpose Bullnose can be used for either interior or exterior applications. Wider flange and "raised" shoulder will accept thicker finishes. Flange is a full 1" (25 mm) wide.

Specification:

Bullnose Corner Bead shall be Plastic Components, Inc. #_____. All drywall accessories shall conform to ASTM standards D3678 and C1047. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. Finish compatible with drywall mud and all paint finishes. Drywall should be offset 1/2" (13 mm). They shall be used where specified by the architect and installed per industry standards.

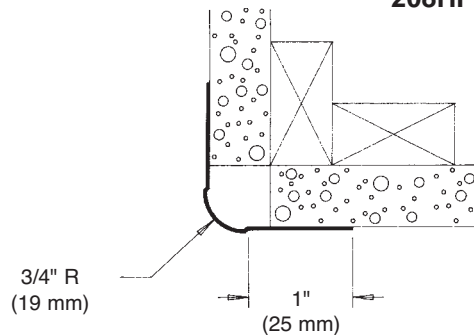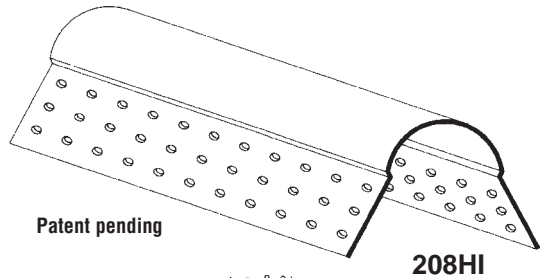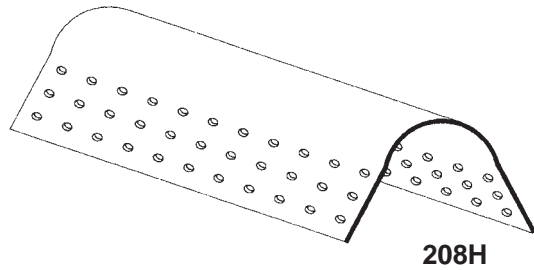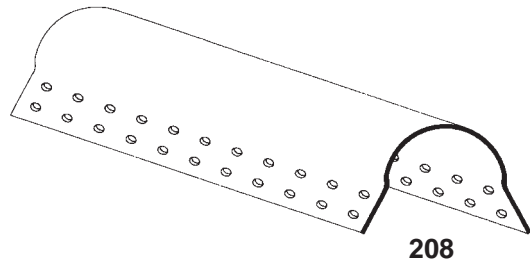

PLASTIC PCTM
COMPONENTS inc.

Caulk all butt joints, intersections and ends.