

Stucco and Plaster

Section: 09200

Corner Bead

Product Number	Dimensions/Descriptions	Pieces Per Box
1A	2.5" (64 mm) x 2.5" (64 mm)	50
1B	1.5" (38 mm) x 1.5" (38 mm)	50
2	2.75" (70 mm) x 2.75" (70 mm)	50
3	2.5" (64 mm) x 1.5" (38 mm)	50
1A4	4" (102 mm) x 4" (102 mm)	30
1A135	2.5" (64 mm) x 2.5" (64 mm) angled flange	50
BN1A	2.5" (64 mm) x 2.5" (64 mm) bullnose flange	20



8' & 10' (2.5 m & 3 m) Lengths

Application:


Provides a rustproof, high-impact-resistant non-kinking corner. The design of the hole pattern in the flanges allows the stucco to flow through forming a solid layer giving the corner extra strength. **Larger** holes in the nailing flange make it easier to install when using stub nails.

Specification:


Corner Bead shall be Plastic Components, Inc. # _____.
All exterior trim shall be of PVC material conforming to ASTM standards D1784, C1063 and D4216. They shall be used where specified by the architect and installed per industry standards.

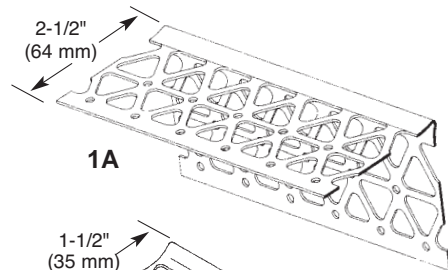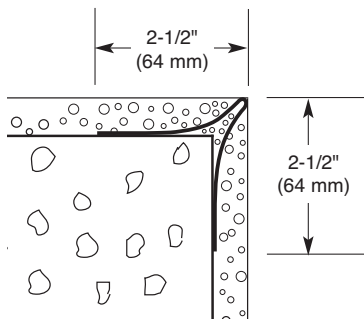


1A

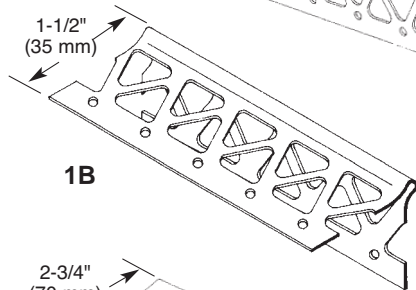


1B

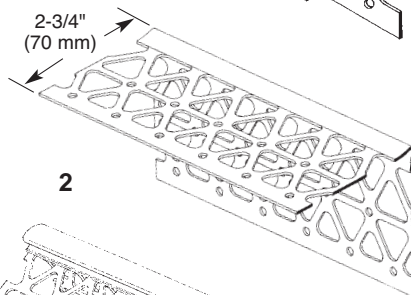

2

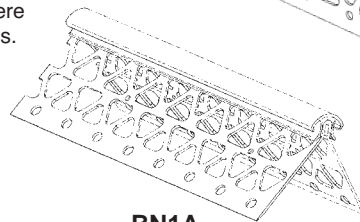

BN1A

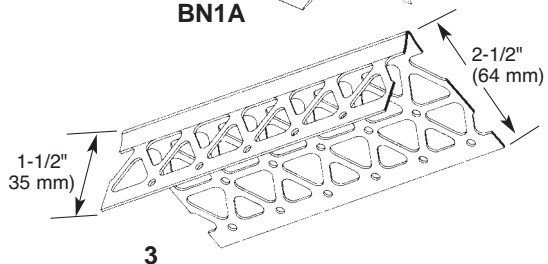

3

Caulk all butt joints, intersections and ends.



PLASTIC PCTM
COMPONENTS inc.