



AP-5010

RECESSED ACCESS DOOR

for acoustical plaster walls and ceilings



Application

- Designed for use in acoustical plaster walls and ceilings

Product Features

- Door is recessed 5/8" and is lined with self-furring lath
- Expansion casing bead with 3" wide galvanized lath
- Concealed, pivoting rod type hinge

AP-5010 Access Door Specifications:

Material: Steel

Door: 16 gauge recessed 5/8" lined with self-furring galvanized lath

Door Frame: 14 gauge expansion casing bead with 3" wide galvanized lath, recessed 3/4" to receive plaster

Hinge: Concealed, pivoting rod type. (For wall applications, a continuous exposed piano hinge is suggested.)

Standard Latch: Flush to surface, Slotted Screwdriver Cam Latch

Optional Latches/Locks: Cylinder lock and key, allen head cam latch, spanner head cam latch


Finish: Steel: 5-stage iron phosphate preparation with prime coat of White alkyd baked-on enamel

AP-5010 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
12 X 12	305 X 305	1	6.0	2.7
18 X 18	457 X 457	2	11.1	5.0
24 X 24	610 X 610	2	17.4	7.9
24 X 36	610 X 914	4	24.3	11.0

Wall or ceiling opening is W + 3/8" (9 mm)
For detailed specifications see submittal sheet

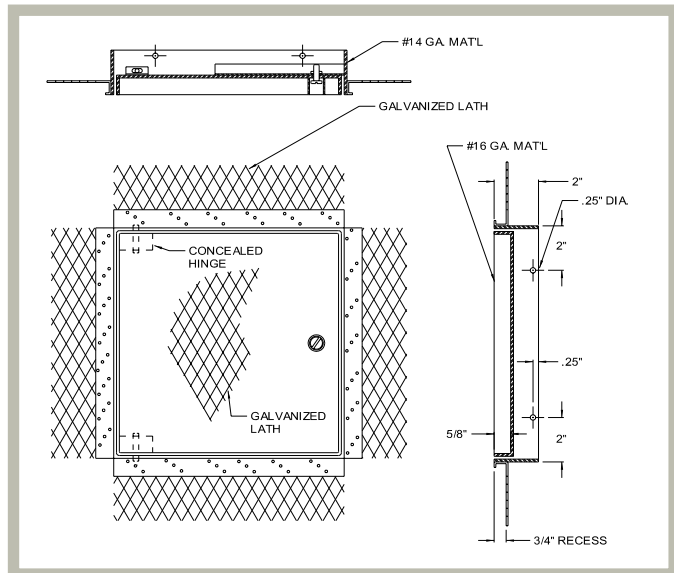

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.