



DW - 5040 PRODUCT INFORMATION

# DW-5040

Flush Access Door, for Drywall

### Application

- Designed specifically for installation in drywall walls and ceilings **after** the drywall has been installed

### Product Features

- Formed door panel with flanges on four sides
- Unique concealed hinge, door flange is a perforated taping bead with pre-punched holes

### DW-5040 Access Door Specifications:

**Material:** 20 gauge galvanized formed door panel, 26 gauge galvanized frame

**Door:** Formed door panel with multiple bends for added strength, flanged on four sides, Integral perforated taping bead adds rigidity

**Hinge:** Concealed

**Standard Latch:** Slotted Screwdriver Cam Latch

**Optional Latches/Locks:** Cylinder lock & key; allen head cam latch; spanner head cam latch, torx head with security pin

**Finish:** 5 stage iron phosphate preparation with white baked-on polyester powder coat on door panel. Frame to be mill finish




### DW-5040 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
6 X 6	152 X 152	1	1.4	0.64
8 X 8	203 X 203	1	1.8	0.82
10 X 10	254 X 254	1	2.6	1.18
12 X 12	305 X 305	1	3.5	1.59
14 X 14	355 X 355	1	4.4	2.00
16 X 16	406 X 406	1	4.8	2.18
18 X 18	457 X 457	1	6.5	2.95
22 X 22	560 X 560	1	10.2	4.63
24 X 24	610 X 610	1	12.3	5.58
24 X 36	610 X 914	2	17.8	8.07
30 X 30	762 X 762	2	17.3	7.85
36 X 36	914 X 914	2	23.0	10.43

Wall or ceiling opening is W + 3/8" (9 mm)  
For detailed specifications see submittal sheet

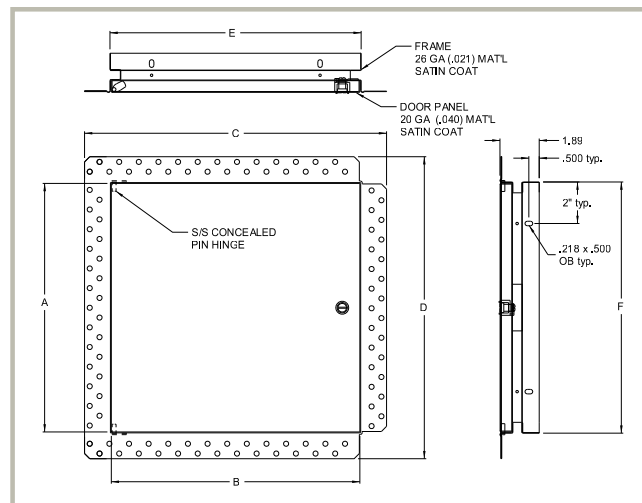

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.