



ED-2002

UNIVERSAL FLUSH

Application

- Installation in Drywall, Plaster, Masonry, Tile or any flush surface
- Economical and attractive access door for walls & ceilings

Product Features

- Formed door panel
- Concealed hinge

ED-2002 Access Door Specifications:

Material: 18 gauge steel door and frame

Door: Flush to frame with reinforced edges

Door Frame: 1" wide outside flange with 1 7/16" deep mounting Frame: Knock over mounting tabs provided on 6x6, 8x8, 10x10 and 12x12

Hinge: Concealed Hinge Pin

Latch: Stainless Steel Slotted Screwdriver Cam Latch

Finish: 5 Stage iron phosphate preparation with prime coat of White alkyd baking enamel




ED-2002 STANDARD SIZES

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
6 X 6	152 X 152	1	1.5	0.7
8 X 8	203 X 203	1	2.1	1.0
10 X 10	254 X 254	1	2.9	1.3
12 X 12	305 X 305	1	3.7	1.7
14 X 14	356 X 356	1	4.6	2.1
16 X 16	406 X 406	1	5.6	2.5
18 x 18	457 x 457	1	6.8	3.1
20 x 20	508 x 508	1	8.2	3.7
24 x 24	610 x 610	1	10.3	4.7
24 x 36	610 x 914	2	16.9	7.7
30 x 30	726 x 762	2	21.2	9.6
36 x 36	914 x 914	2	24.5	11.1

Wall opening is W + 3/8" (9 mm)

For detailed specifications see submittal sheet

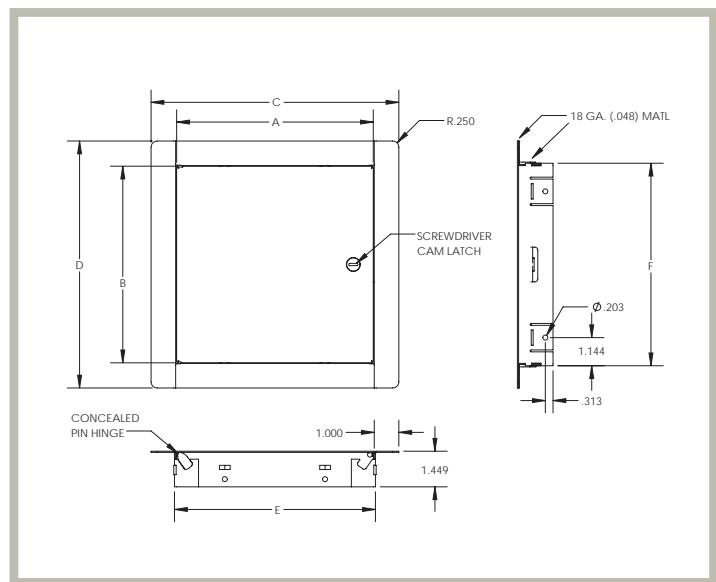

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.