



# PS-5030

## FLUSH ACCESS DOOR for plaster walls & ceilings

### Application

- Installation in plaster walls and ceilings, **before** the plaster is applied

### Product Features

- An expansion casing bead with 3" wide galvanized lath
- Concealed continuous hinge

### PS-5030 Access Door Specifications:

Material: Door / Door Frame: 14 gauge

Mounting Frame: Formed door panel, flanged on four sides, flush to edge of frame expansion casing bead with 3" wide galvanized lath, recessed 3/4" to receive plaster

Hinge: Continuous, concealed

Standard Latch: Stainless steel slot screwdriver operated cam latch

Optional Latches/Locks: Cylinder lock & key, allen head cam latch, spanner head cam latch, torx

Finish: 5 stage iron phosphate preparation with prime coat of White alkyd baked-on enamel




### PS-5030-DW STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
6 x 6	152 x 152	1	3	1.4
8 X 8	203 X 203	1	3.5	1.5
10 X 10	254 X 254	1	4.5	2
12 X 12	305 X 305	1	6	2.7
14 X 14	355 X 355	1	7.5	3.3
16 X 16	406 X 406	2	9.5	4.2
18 X 18	457 X 457	2	11.5	5.1
22 X 22	560 X 560	4	15	6.7
24 x 24	610 x 610	4	19	8.4
24 X 36	610 X 914	5	28	12.4
30 X 30	762 X 762	5	27.5	12.5
36 x 36	914 x 914	5	39	17.7

Wall opening is W + 3/8" (9 mm)

For detailed specifications see submittal sheet

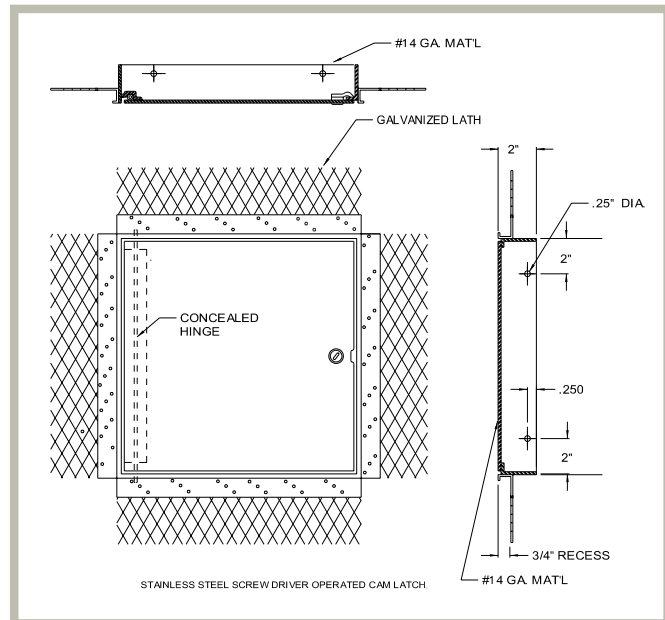

Product specifications may change without notice. Acudor is a registered Trade Mark ©2015