

Drywall Access Panel with Fully Detachable Hatch

Aluminum frame, with drywall inlay, for ceilings, drywall, and various applications - System F2 AK

NEW



Ready-to-paint door leaf

Description

The access panel consists of a welded aluminum frame and is available with 1/2" (12.7 mm) or 5/8" (15.9 mm) inlaid drywall and two latches.

Both an outer and an inner frame assembly consists of high grade aluminum which is bonded with a special welding process.


For sizes 12" x 12" (305 mm x 305 mm) and up the access panels are equipped with a safety-system to prevent accidental opening. This safety system must be reattached if the hatch is removed.

A reveal of just 1/16" (1,59 mm) is all that is visible of the access panel that blends into a wall or ceiling.



The concealed snap locks open the access panel when pressure is applied to the spring loaded latch side.

The panel door is equipped with a perimeter seal.

Fully Detachable Hatch

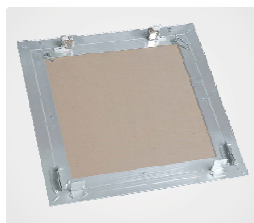

Fully detachable hatch

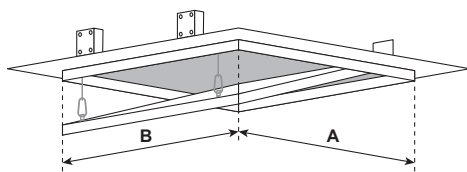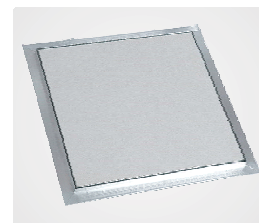

Customized solutions

Customized sizes can be produced in every dimension upon request.

Drywall insert with screws on larger sizes than 24" x 24" (610 mm x 610 mm).

System F2 Code	Dimensions	
	A inch mm	B inch mm
A203203G127	8" 203	8" 203
A305305G127	12" 305	12" 305
A406406G127	16" 406	16" 406
A508508G127	20" 508	20" 508
A610610G127	24" 610	24" 610

All standard sizes are available in 1/2" (12.7 mm) or 5/8" (15.9 mm) drywall.

Options

- SD** Screwdriver operated cam latch
- FS** Screwdriver operated four-square cam latch
- Z** Round Cylinder Lock with Key
- M** Mortise Cylinder Lock Preparation
- H** Hex Head Cam Latch
- P** Pinned Hex Head Cam Latch

Advantages of FF Systems Panels

- Superior engineering & innovative design
- Fast delivery
- Quick and easy installation
- Solid aluminum frame
- Flush installation in ceilings and walls
- Available in moisture / mildew resistant green board and cement board

FF Systems
Access Panels

Rough opening is door size + 3/8" (9 mm)