


Stucco and Plaster

Section: 09200

Beveled Angle Casing Bead



Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
1050BA	1/2" (13 mm)	Beveled angle casing bead, 2" (51mm) wide perforated flange.	75
1058BA	5/8" (16 mm)		75
1075BA	3/4" (19 mm)		75
1078BA	7/8" (22 mm)		75
1100BA	1" (25 mm)		50

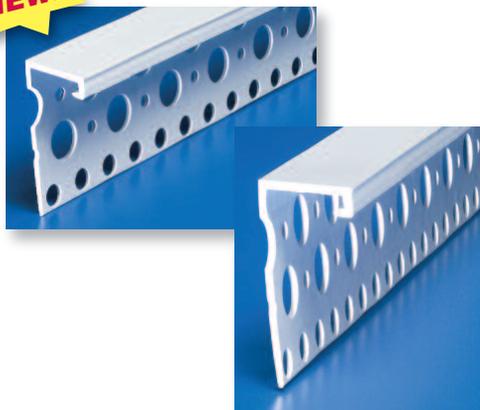

10' (3 m) Lengths

Add suffix "WP" to order with weep holes. Example: 1050BAWP

Application:

For use where stucco and plaster terminate at windows, doors or other dissimilar materials. The Beveled Angle Casing Bead provides a gradual transition to allow moisture to drain away from the structure.

Specification:

Beveled Angle Casing Bead shall be Plastic Components Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063 and D4216. They shall be used where specified by the architect and installed per industry standards.

Narrow Flange Casing Bead

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
1038X	3/8" (10 mm)	Narrow flange casing bead, 1-1/4" (32 mm) perforated flange.	75
1050X	1/2" (13 mm)		75
1075X	3/4" (19 mm)		75
1078X	7/8" (22 mm)		75

10' (3 m) Lengths


Add suffix "WP" to order with weep holes. Example: 1050XWP

Application:

Use around openings or where stucco terminates at a dissimilar surface. Allows stucco to maintain a straight line.

Specification:

Narrow Flange Casing Bead shall be Plastic Components, Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063 and D4216. They shall be used where specified by the architect and installed per industry standards.

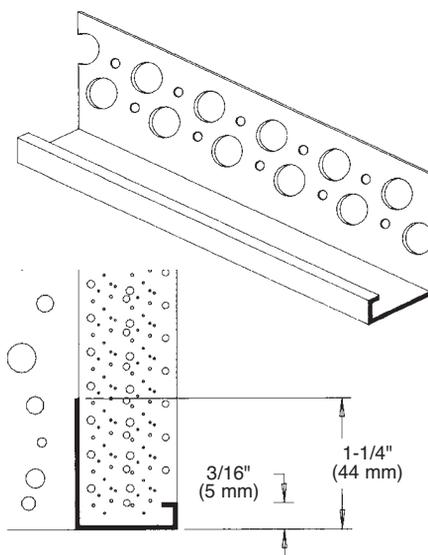

Caulk all butt joints, intersections and ends.

