

Stucco and Plaster




Section: 09200

Clog-free Continuous Soffit Vent for Stucco Soffit

| Product Number | Ground | Dimensions/Descriptions | Pieces Per Box |
|----------------|------------|--|----------------|
| 549-75-25 | 1" (25 mm) | Continuous Soffit Vent with 1/4" (6 mm) holes. Vent area 2-3/8" (60 mm) | 13 |

10' (3 m) Lengths

Connector Clips Included

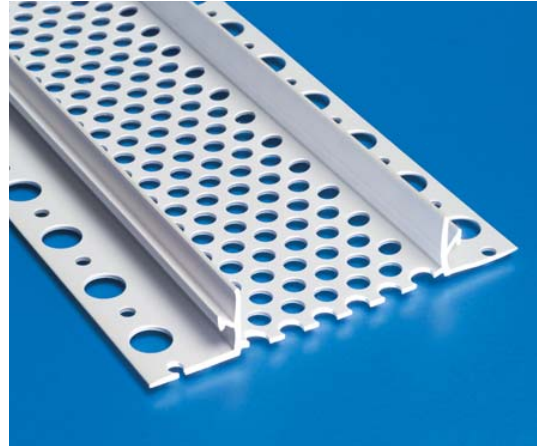

Application:

Large 1/4" (6 mm) vent hole configuration that offers excellent air flow that resists paint clogging. It has a 1" (25 mm) nailing flange for easier installation on soffits where 3/8" sheathing material is used. Rustproof and corrosion-resistant with excellent bonding to stucco.

Specification:

Clog Free Continuous Soffit Vent for Stucco Soffit will be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.

