

Stucco and Plaster

Section: 09200

Three-Piece Continuous Soffit Vent 1", 2", 3", 4" and 6" wide vents

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
550-38	3/8" (10 mm)	Three part soffit vent with removable 2-5/8" (67 mm) vent. 1-3/4" (44 mm) vent may be substituted. Up to 15 sq. in. (9,678 sq. mm) of free air flow per linear ft.	15
550-50	1/2" (13 mm)		13
550-58	5/8" (16 mm)		11
550-75	3/4" (19 mm)		11
550-78	7/8" (22 mm)		11
4550-38	3/8" (10 mm)	Three part soffit vent with removable 4" (102 mm) vent. 3" (76 mm) vent may be substituted. Up to 16 sq. in. (10,323 sq. mm) of free air flow per linear ft.	15
4550-50	1/2" (13 mm)		13
4550-58	5/8" (16 mm)		11
4550-75	3/4" (19 mm)		11
4550-78	7/8" (22 mm)		11
6550-38	3/8" (10 mm)	Three part soffit vent with 6" (152 mm) vent 20 sq. in. (12,904 sq. mm) of free air flow per linear ft.	11
6550-50	1/2" (13 mm)		11
6550-58	5/8" (16 mm)		11
6550-75	3/4" (19 mm)		11
6550-78	7/8" (22 mm)		11



10' (3 m) Lengths • **Product ships unassembled.**

Application:



This product consists of three parts; two stucco stops, and a removable vent. The vent can be removed before stucco is applied, keeping the vent clean and eliminating the need for masking. Connector clips included.

Specification:



Three-Piece Soffit Vent shall be Plastic Components, Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063 and D4216. They shall be used where specified by the architect and installed per industry standards.

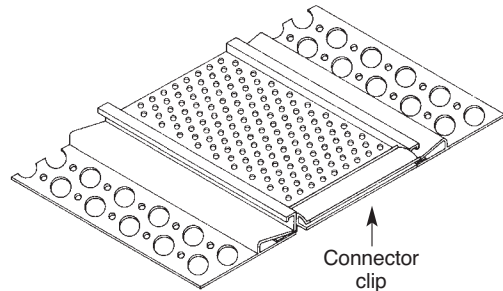

550



4550

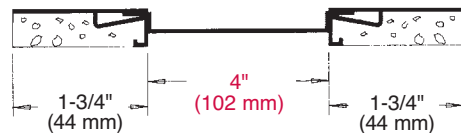

6550

Caulk all butt joints, intersections and ends.



PLASTIC PCTM
COMPONENTS inc.