


Drywall Accessories

Section: 09260

Bullnose Arch with One Slotted Leg

Product Number	Dimensions/Descriptions	Pieces Per Box
208A	5/8" (16 mm) flange.	50
208HA	1" (25 mm) flange.	50
208HIA	1" (25 mm) offset flange.	50

8' & 10' (2.5 & 3 m) Lengths

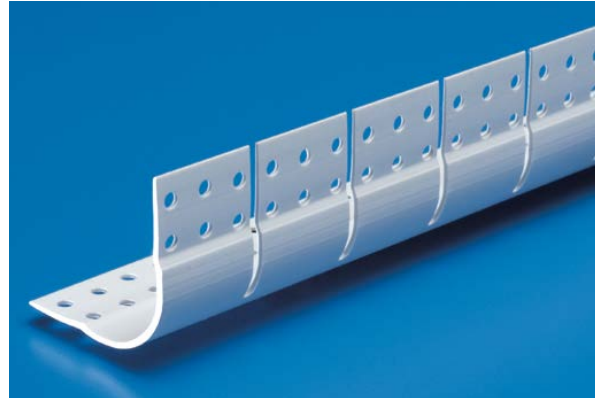

Application: 208A

An ideal solution for hard-to-do arches. Fast installation. Excellent tape and drywall mud adhesion. Will not kink.

Application: 208HA

Designed to provide a more "open" radius. Shallow shoulder allows for a thinner veneer finish. Mudding flange is a full 1" (25 mm) wide.

Application: 208HIA

Dual purpose Bullnose can be used for either interior or exterior applications. Wider flange and "raised" shoulder will accept thicker finishes. Flange is a full 1" (25 mm) wide.

Specification:

Arched Bullnose products shall be Plastic Components, Inc. #_____. All drywall accessories shall conform to ASTM standards D3678 and C1047. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. Finish compatible with drywall mud and all paint finishes. They shall be used where specified by the design authority and installed per industry standards.



C-11