

2022


# Stucco and Plaster

Section: 09200

## Casing Bead w/5" Flange

Product Number	Ground	Dimensions/Descriptions	Pieces per Box
1050XL	1/2" (13 mm)	Casing bead, 5" (127 mm) perforated flange.	40
1058XL	5/8" (16 mm)		40
1075XL	3/4" (19 mm)		40
1078XL	7/8" (22 mm)		40

10' (3 m) Lengths

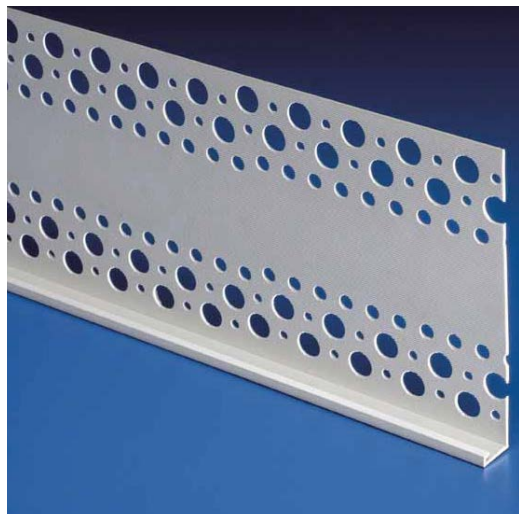


### Application:

Use where a 5" flange is required at the termination point at a roof line. Flange is striated to assist in bonding.

### Specification:

Casing Bead with 5" Flange shall be Plastic Components, Inc. #\_\_\_\_\_. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

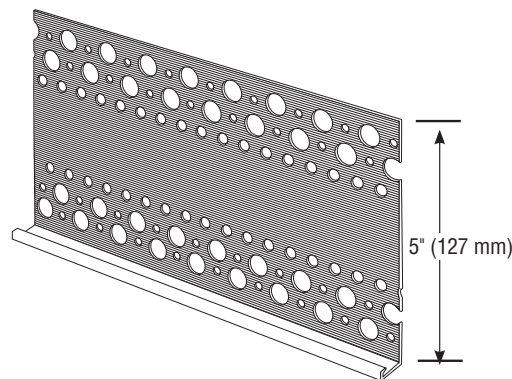

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



A-9

305.885.0561 ■ 800.327.7077  
www.plasticcomponents.com