

Stucco and Plaster

Section: 09200

Continuous Soffit Vent for Soffit Applications 1-3/4", 2-5/8", 3", 4" and 6" vents

Product Number	Reveal	Vent Area	Air Flow/linear ft.	Pieces per Box
300	3/8" (10 mm)	2-5/8" (67 mm)	15 sq. in. (9,678 sq. mm)	50
301	3/8" (10 mm)	1-3/4" (44 mm)	7 sq. in. (4,516 sq. mm)	50
3300	3/8" (10 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	35
4300	3/8" (10 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	35
6300	3/8" (10 mm)	6" (152 mm)	20 sq. in. (12,904 sq. mm)	30

10' (3 m) Lengths







Connector Clips Included

Application:

Used on soffits where 3/8" (10 mm) sheathing is being used. Vent holes are 1/8" (3 mm) diameter. Excellent paint adhesion. Connector clips included. Will not rust or corrode.

Specifications:

Soffit Vent shall be Plastic Components Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

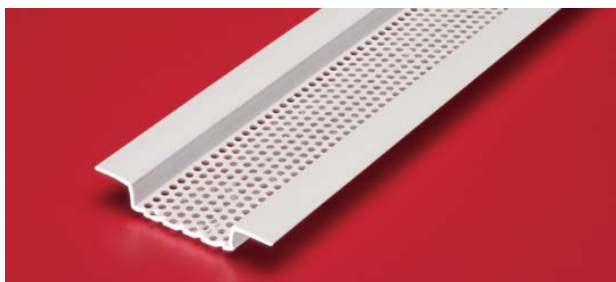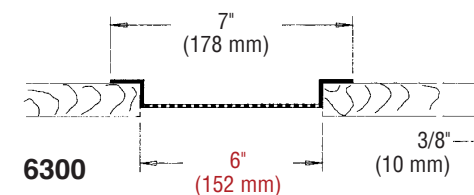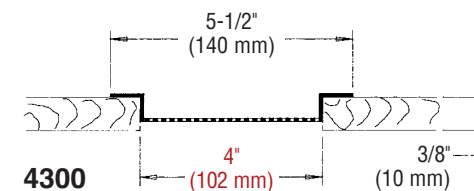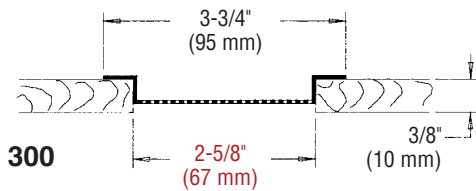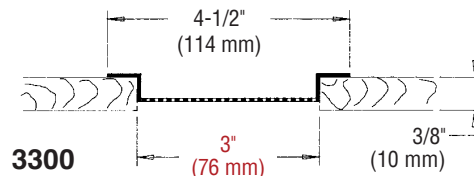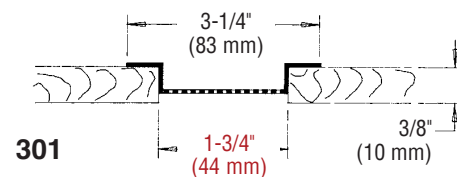

PLASTIC PC™
COMPONENTS inc.

A-30

305.885.0561 ■ 800.327.7077
www.plasticcomponents.com