



DEFS Control Joint Submittal Sheet



STOCK NO.	LENGTH	PCS. PER BOX
PL093	10'	60

Description: This Control Joint is a flexible PVC profile designed for DEFS systems, with a deep "V" groove to absorb movement and reduce cracking. It fits between separated sheathing, with perforated flanges for solid bonding and built-in stops to keep your finish consistent. Removable tape protects the reveal during installation.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

Date _____

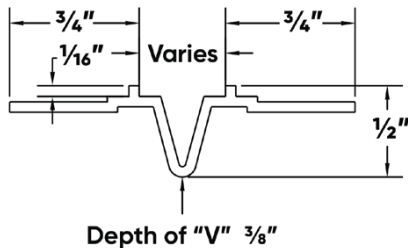

Approvals (Signatures or Stamps)