


CI/EIFS/Hard Coat

Section: 07240


STARTER TRAC™

Product Number	Dimension A	Pieces per Box
ST-50	1/2" (13 mm)	35
ST-58	5/8" (16 mm)	35
ST-75	3/4" (19 mm)	30
ST-78	7/8" (22 mm)	30
ST-1	1" (25 mm)	25
ST-125	1-1/4" (32 mm)	20
ST-15	1-1/2" (38 mm)	20
ST-158	1-5/8" (41 mm)	15
ST-175	1-3/4" (44 mm)	15
ST-2	2" (51 mm)	15
ST-225	2-1/4" (57 mm)	15
ST-25	2-1/2" (64 mm)	15
ST-275	2-3/4" (70 mm)	10
ST-3	3" (76 mm)	10
ST-35	3-1/2" (89 mm)	10
ST-4	4" (102 mm)	10

10' (3 m) Lengths

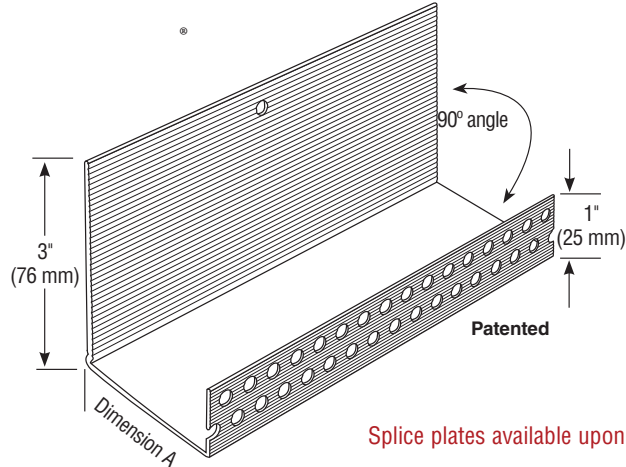

Splice plates available upon request

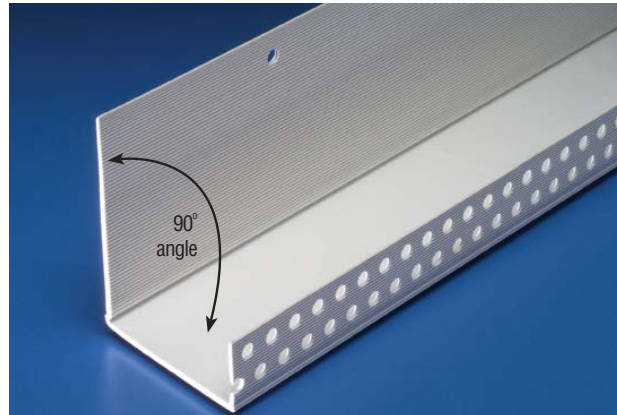

Application:

Can be used as a STARTER TRAC® or Casing Bead. Face return flange is 1" (25 mm) with striations which provide a strong physical bond for the base coat and perforations for bonding the base to the substrate. Available with weep holes. Ideal for use where finished edge is exposed. 3" (76 mm) wide nailing flange also has striations for extra bonding.

Specifications:

STARTER TRAC®/Casing Bead shall be Plastic Components, Inc. # _____. All exterior accessories shall meet ASTM standards D1784, C1063 and D4216, shall be third party tested and Canadian Code Compliant. They shall be used where specified by the design authority and installed per industry standards.

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.



D-11

305.885.0561 ■ 800.327.7077
www.plasticcomponents.com