

2014



Stucco and Plaster

Section: 09200

Factory Assembled Intersections for Floor Line Control Bead


Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
2078-50AIC	7/8" (22 mm) x 1/2" (13 mm)	Factory assembled inside and outside corner intersections, 7/8" (22 mm). Floor line control bead.	15
2078-50AOC	7/8" (22 mm) x 1/2" (13 mm)		15
2078-58AIC	7/8" (22 mm) x 5/8" (16 mm)		15
2078-58AOC	7/8" (22 mm) x 5/8" (16 mm)		15

Application:

Factory Assembled Floor Line Control Bead Intersections reduce labor in the field and provide a better quality finish.

Specification:

Factory Assembled Intersections Floor Line Control Bead will be Plastic Components, Inc. #_____. All exterior accessories shall conform to ASTM standards D1784, C1063 and D4216. All products shall be third party tested to meet ASTM standard D4216 and be Canadian Code Compliant. They shall be used where specified by the architect and installed per industry standards.

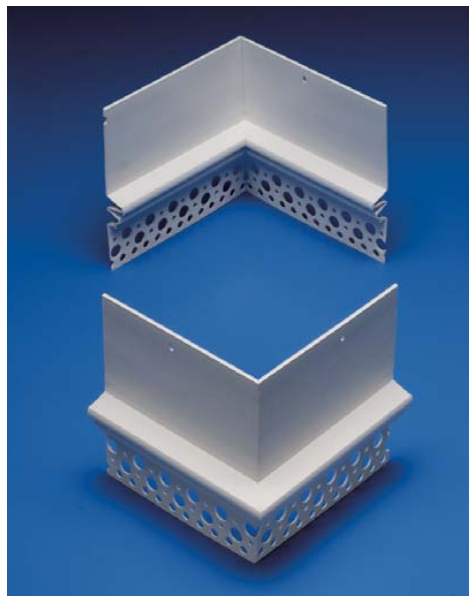

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



PLASTIC PC
COMPONENTS inc.

A-16