



**DUCT ACCESS DOOR
Model KHD (Hinged)**



DATE

SPECIFICATIONS

GENERAL SCOPE:

Access doors shall be Karp Type KHD (Hinged) and Type KCD (No Hinge) as manufactured by Karp Associates, Inc., Melville, N.Y.

Sizes shall be as indicated on the drawings.



CONSTRUCTION:

1. a. On door sizes of 12 x 12 inches and smaller, door shall be 24 gage galvanized steel.
- b. On door sizes of 14 x 14 inches and larger, door shall be 22 gage galvanized steel.
2. Frame shall be 22 gage galvanized steel.
3. Hinge shall be aluminum , continuous piano.
4. Door shall be filled with 2" thick fiberglass insulation compressed into 1". R factor = 7.7
5. Gasketing between door and frame shall be 1/2" thick by 1/8" wide closed cell neoprene gasketing.
6. Cam latches shall be zinc plated steel - self-tightening and hand operated.
7. Back of frame to have 5/8" notched knock-over edges.

STANDARD SIZES

DOOR SIZE H X W (INCHES)	ACTUAL DOOR MEASUREMENTS (INCHES)	DUCT OPENING (INCHES)	CAMS	SHIP WT. (LBS.)
6 x 6	5 1/2 x 5 1/2	4 3/4 x 4 3/4	1	1.1
8 x 8	7 1/2 x 7 1/2	6 3/4 x 6 3/4	1	1.8
10 x 10	9 1/2 x 9 1/2	8 3/4 x 8 3/4	1	2.4
12 x 12	11 1/2 x 11 1/2	10 3/4 x 10 3/4	1	3.2
14 x 14	13 1/2 x 13 1/2	12 3/4 x 12 3/4	2	4.9
16 x 16	15 1/2 x 15 1/2	14 3/4 x 14 3/4	2	5.5
18 x 18	17 1/2 x 17 1/2	16 3/4 x 16 3/4	2	6.6
24 x 24	23 1/2 x 23 1/2	22 3/4 x 22 3/4	2	11.0

PROJECT DATA					
Project Name:					
Architect:					
Contractor:					
Agent/Customer Name:					
Tagging Instructions:					
Special Instructions:					
PROJECT SCHEDULE					
Qty.	H	W	No. of Latches	Finish	Remarks

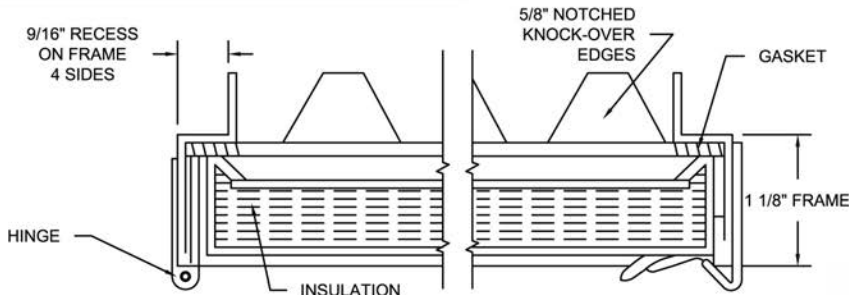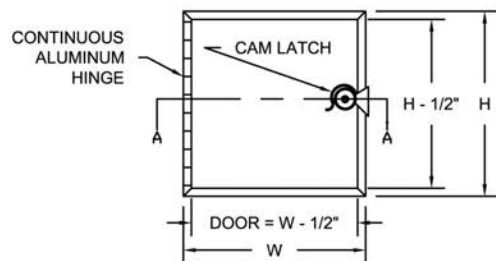

SECTION A-A



Made with Union Labor