

2022

Stucco and Plaster

Section: 09200

"M" Control Joint

| Product Number | Ground* | Dimensions/Descriptions | Pieces per Box |
|----------------|--------------|---|----------------|
| 2025 | 1/4" (6 mm) | "M" Control Joint with removable tape perforated flanges. | 50 |
| 2138XS | 3/8" (10 mm) | | 50 |
| 2150X | 1/2" (13 mm) | "M" Control Joint 1/2" (13 mm) with removable tape. Larger perforated flanges with two rows of holes. | 40 |
| 2158X | 5/8" (16 mm) | | 40 |
| 2175X | 3/4" (19 mm) | | 30 |
| 2178X | 7/8" (22 mm) | | 30 |
| 2100X | 1" (25 mm) | | 20 |

10' (3 m) Lengths


* For Stucco Trim, Ground dimension is measured from the back side of the flange to the top side of the trim piece.

Application:

This popular "M" design not only provides control of substrate movement but also gives the appearance of a narrow reveal. Removable tape keeps the "V" clean during installation.

Specifications:


"M" Control Joint shall be Plastic Components Inc. #_____. All exterior accessories shall meet ASTM standards D1784, C1063, C1861 and D4216, shall be third party tested and Canadian Code Compliant. They shall be used where specified by the design authority and installed per industry standards.

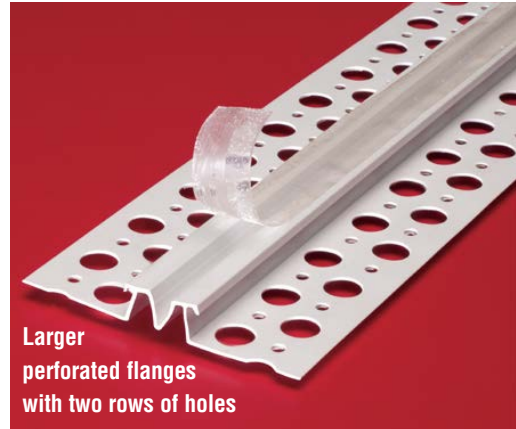

Larger perforated flanges with two rows of holes



"F" Series also available. Add prefix "F" to the product number. e.g. Product F2150X

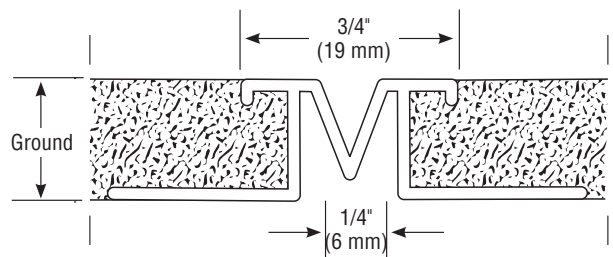

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



A-21