



M Control Joint Submittal Sheet



STOCK NO.	A SIZE	LENGTH	PCS. PER BOX
2025	1/4"	10'	50
2138XS	3/8"	10'	50
2150X	1/2"	10'	40
2158X	5/8"	10'	40
2175X	3/4"	10'	30
2178X	7/8"	10'	30

Description: The M Control Joint is built to handle movement in large stucco or plaster surfaces. Its narrow center groove creates a clean, subtle reveal while relieving stress from temperature change and expansion/contraction of walls. By allowing controlled movement, this bead helps prevent cracks and keeps your finish looking sharp. Removable tape keeps the joint clean during install.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

Date _____

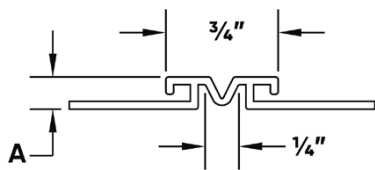

Approvals (Signatures or Stamps)