

2022

Stucco and Plaster

Section: 09200

Narrow Flange Casing Bead (Weeped or Unweeped)

Product Number	Ground*	Dimensions/Descriptions	Pieces per Box
1038X	3/8" (10 mm)	Narrow flange casing bead, 1-1/4" (32 mm) perforated flange.	75
1050X	1/2" (13 mm)		75
1058X	5/8" (16 mm)		75
1075X	3/4" (19 mm)		75
1078X	7/8" (22 mm)		75

10' (3 m) Lengths


Add suffix "WP" to order with weep holes. Example: 1050XWP

Application:

Use around openings or where stucco terminates at a dissimilar surface. Allows stucco to maintain a straight line.

Specification:

Narrow Flange Casing Bead shall be Plastic Components, Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

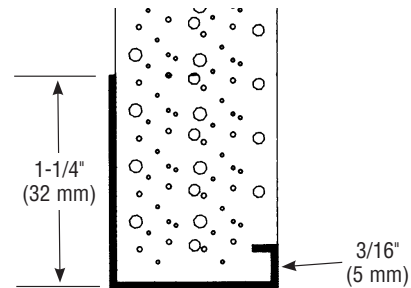

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



PLASTIC PC™
COMPONENTS inc.

A-5