



SUBMITTAL: SHWC™ SAFETY RAIL FOR ROOF OPENINGS

The Saf-T-Hatch™ Railing can be installed on any manufacturer's roof hatch. This patented railing system features a clamping frame that is assembled around the curb base of roof hatch or skylight. This railing does not penetrate the curb or the roof deck - it is designed to protect your roof warranty.

Complies with OSHA CFR 29 -1910.29 when ordered with optional self-closing gate—SHG-2436.

SPECIFICATIONS:

Pipe Rail: 1-5/8" O.D. A53 grade B seamed galvanized steel tubing. Grab bar provided for openings 36" or greater.

Tubing Base: Galvanized 2" x 2" 16 gauge seamed steel.

Tubing Base Pad: Styrofoam 3/4" thick isolated pad.

Finish: Safety yellow powder coat paint finish

Hardware: Zinc-plated threaded rods, caps, nuts, bolts and washers. Cast steel hot dipped galvanized clamps.

Chain: Zinc-plated 3/16" ASTM proof coil with hoop and rings as required

Pipe Caps: Zinc-plated.

Installation: Quickly installs by a clamping frame around curb base of roof hatch. Does not penetrate the roof deck or require "approved" installer. Fits all brands of existing roof hatches with curb - field adjustable to fit curb outside size. Railing may also be installed on cap flashing as shown at right.



SHWC 3036 RAILING

STEP 1 - ENTER QUANTITY AND SELECT MODEL ON PAGE 2


STEP 2 - SELECT OPTIONAL FEATURES AT ADDITIONAL COST:

 SHG-2436 Self-Closing Adjustable Gate: Extends to fit roof hatches with opening size from 24" to 48".
Complies with OSHA CFR 29 -1910.29 when ordered with rigid self-closing gate.

 -GRAB: Optional Welded Grab Bar for Models Narrower than 36"
(Standard on Models with 36" or greater egress side opening)

Integrated RHG Steel Roof Hatch with Permanent Rail Supports - See Separate Submittal for RHG-STH

Interpretation of OSHA and Building Codes may vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 JL INDUSTRIES	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date: © 2022 Activar Construction Products Group ,Inc.
11/16/2022		




SUBMITTAL: SHWC™ SAFETY RAIL FOR ROOF OPENINGS

Qty	Model Please note new part #	Curb Opening Railing Egress Side	Curb Opening	Approx Weight	Fits ACPG Roof Hatch Model	Includes Grab Bar*
	SHWC-3036	30"	36"	66 lbs	RHDA/RHDG/RHR-1	N
	SHWC-3054	30"	54"	70 lbs	RHDA/RHDG-2	N
	SHWC-3096	30"	96"	80 lbs	RHDA/RHDG-3	N
	SHWC-3636	36"	36"	68 lbs	RHDA/RHDG-4	Y
	SHWC-4848	48"	48"	75 lbs	RHDA/RHDG-5	Y (2)
NEW STANDARD SIZES NOW AVAILABLE BELOW!						
Qty	Model	Curb Opening Railing Egress Side	Curb Opening	Approx Weight	Fits Roof Hatch with Outside Curb Dimensions Length x Width	Includes Grab Bar*
	SHWC-2424	24"	24"	55 lbs	26" x 26" Min 30" x 30" Max	N
	SHWC-2430	24"	30"	60 lbs	26" x 32" Min 30" x 36" Max	N
	SHWC-2436	24"	36"	60 lbs	26" x 38" Min 30" x 42" Max	N
	SHWC-2496	24"	96"	75 lbs	26" x 98" Min 30" x 102" Max	N
	SHWC-3030	30"	30"	65 lbs	32" x 32" Min 36" x 36" Max	N
	SHWC-3648	36"	48"	70 lbs	38" x 50" Min 42" x 54" Max	Y
	SHWC-3696	36"	96"	90 lbs	38" x 98" Min 42" x 102" Max	Y



SHWC-3636 SHOWN WITH STANDARD GRAB BAR
(Standard with 36" and Greater Egress Side Opening)

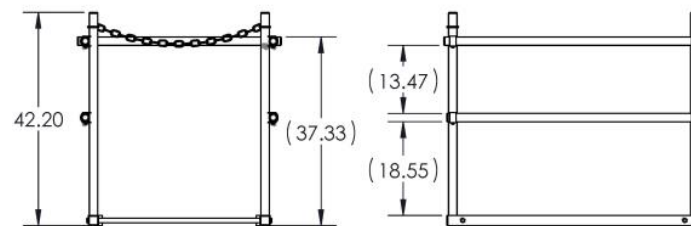

Egress View

Other View

*Grab bar is standard when egress side opening is 36" or greater.

CUSTOM SIZES AVAILABLE UPON REQUEST:

Outside Curb Dimension Egress Side: _____

Outside Curb Dimension Other Side: _____

Please attach drawing and clearly indicate egress side and location of stair or ladder.

Contact Customer Service for Custom Requests.