


TRIM-TEX™

EXTERIOR SOLUTIONS

Sill Screed Submittal Sheet

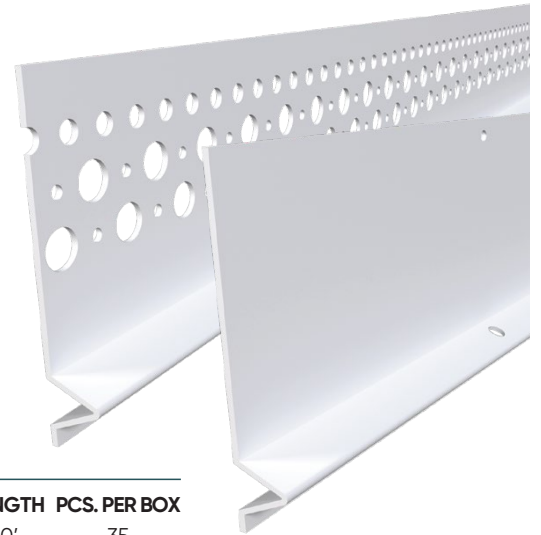

STOCK NO.	A SIZE	B SIZE	LENGTH	PCS. PER BOX
631-50	1/2"	2 1/2"	10'	35
631-58	5/8"	2 1/2"	10'	35
631-75	3/4"	2 1/2"	10'	35
631-78	7/8"	2 1/2"	10'	30
632-38	3/8"	3 1/2"	10'	35
632-50	1/2"	3 1/2"	10'	35
632-58	5/8"	3 1/2"	10'	35
632-75	3/4"	3 1/2"	10'	35
632-78	7/8"	3 1/2"	10'	30
632-100	1"	3 1/2"	10'	25
632-138	1 3/8"	3 1/2"	10'	30

W/ HOLES	A SIZE	B SIZE	LENGTH	PCS. PER BOX
631-58WP	5/8"	2 1/2"	10'	35
631-75WP	3/4"	2 1/2"	10'	35
631-78WP	7/8"	2 1/2"	10'	35

EXT. LEG	A SIZE	B SIZE	LENGTH	PCS. PER BOX
632-50EL	1/2"	3 1/2"	10'	75
632-78EL	7/8"	3 1/2"	10'	75
632-138EL	1 3/8"	3 1/2"	10'	75

Description: Sill Screeds form a sharp, durable edge at the base of exterior walls while letting moisture flow away from the building. Installed where the wall meets the foundation, they help drain trapped water and protect finishes from damage. A great way to add clean lines and ensure proper drainage in stucco systems.


Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.

Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

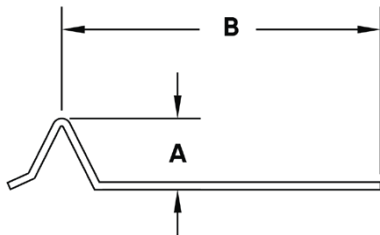

Approvals (Signatures or Stamps)