
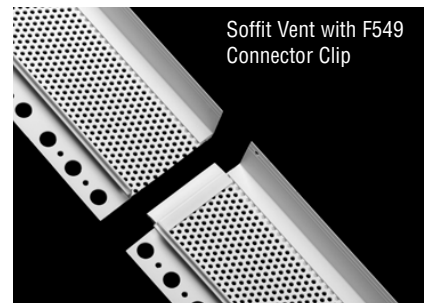


Stucco and Plaster

Section: 09200

Two-Piece Continuous Soffit Vent 2-3/8", 3" and 4" vents

Product Number	Ground	Vent Area	Air Flow/linear ft.	Pieces per Box
F549-50 WF551	1/2" (13 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
F549-58 WF551	5/8" (16 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
F549-75 WF551	3/4" (19 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
F549-78 WF551	7/8" (22 mm)	2-3/8" (60 mm)	15 sq. in. (9,678 sq. mm)	13
F3549-50 WF551	1/2" (13 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
F3549-58 WF551	5/8" (16 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
F3549-75 WF551	3/4" (19 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
F3549-78 WF551	7/8" (22 mm)	3" (76 mm)	15 sq. in. (9,678 sq. mm)	13
F4549-50 WF551	1/2" (13 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
F4549-58 WF551	5/8" (16 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
F4549-75 WF551	3/4" (19 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13
F4549-78 WF551	7/8" (22 mm)	4" (102 mm)	16 sq. in. (10,323 sq. mm)	13

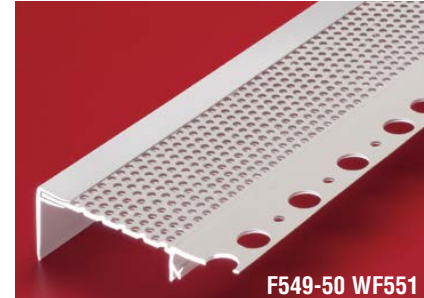

Position 90° leg up or down by removing it, reversing the direction, and reinstalling it.



10' (3 m) Lengths • **Product ships unassembled.**
Connector Clips Included.

Application:

Low cost, simple solution when a soffit vent terminates at either the fascia board or vertical wall. Simply attach the vertical "F" clip to vertical plane and insert the soffit vent into the "F" clip. Vent hole size 1/8" (3 mm) diameter.

Specifications:

Soffit Vent shall be Plastic Components Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.



A-34