




Surface-Mounted Vent Submittal Sheet

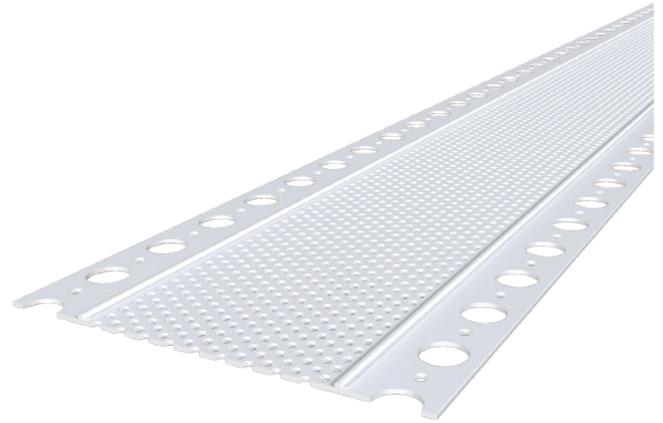

STOCK NO.	A SIZE	AIRFLOW/ LF	LENGTH	PCS. PER BOX
SMV3	3"	15 sq in.	10'	35
SMV4	4"	16 sq in.	10'	35
SMV6	6"	18 sq in.	10'	30


Description: The Surface-Mounted Vent is a great fit for all exterior insulation systems except three-coat stucco. Designed to install easily over common sheathing types, it works with spray adhesives, staples or screws, depending on your substrate. Built-in vent holes allow for consistent airflow, and it's ready for mesh and base coat per your system's requirements.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.

Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____
 Contractor _____
 Date _____



Approvals (Signatures or Stamps)