

Stucco and Plaster

Section: 09200

"T" Bar Casing Bead

Product Number	Ground	Dimensions/Descriptions	Pieces per Box
1100	1" (25 mm)	"T" bar casing bead, 1-3/4" (44 mm) wide perforated flange. Designed for extra strength.	50
1125	1-1/4" (32 mm)		50
1150	1-1/2" (38 mm)		50
1200	2" (51 mm)		40

10' (3 m) Lengths




Application:

To be used in any area where a banding/pop out or "quoin" detail is desired. "T" bar design adds strength and will reduce "waving" with the extra thickness of the stucco.

Specification:

Casing Beads shall be Plastic Components, Inc. # _____.
All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

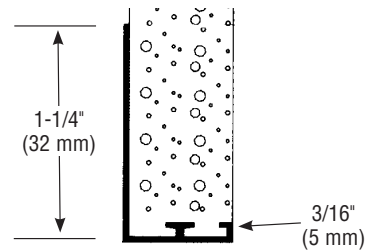

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



A-6

305.885.0561 ■ 800.327.7077
www.plasticcomponents.com