




ULTRA-LATH PLUS® Submittal Sheet

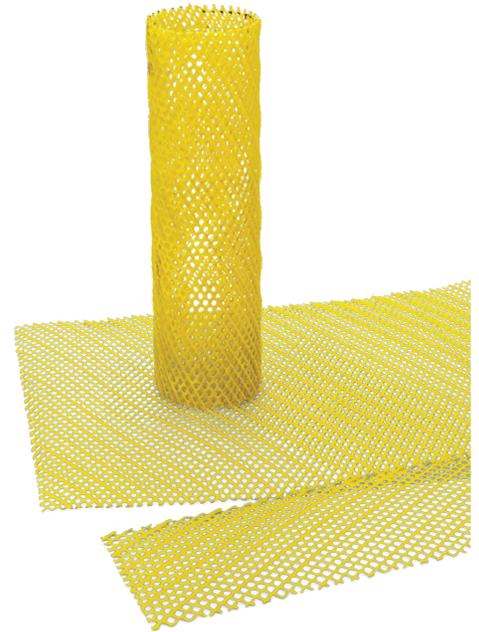

STRIPS	THICKNESS	DIMS.	PCS. PER BOX
PDM4-25	1/4"	4" x 96"	50
PDM6-25	1/4"	6" x 96"	50
PDM8-25	1/4"	8" x 96"	35
SHEETS	THICKNESS	DIMS.	COVERAGE
PDM2796-25	1/4"	27" x 96"	180 sf
PDM2796PB-25	1/4"	27" x 96"	180 sf
ROLLS	THICKNESS	ROLL DIMS.	COVERAGE
PDMR-25	1/4"	27" x 75'	168 sf

Description: ULTRA-LATH PLUS® is a rust-proof yellow plastic lath designed for both horizontal and vertical uses in three-coat stucco systems. With a resilient, lightweight design for heavy-duty applications, this lath cuts easily with a utility knife; is unaffected by chemicals; won't corrode; is self-furred for ASTM compliance; and is safe to handle, with no sharp edges. ULTRA-LATH PLUS is ultra-tough, ultra-reliable and ultra-durable. Available in strips, sheets and rolls.

Advantages: Non-rusting, safer and lighter alternative to metal lath. Unaffected by salt, moisture and chemicals. Compatible with all cement-based products.

Applicable Standards: ASTM C926, C1063, C1764, C1787, C1788 and C1861.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods for plastic lath. Not recommended for open framing. Lath to be installed with ribbed side against substrate. Lap a minimum of 1" and fasten 6" on center (OC). Overlap 1/2" minimum and wire or cable tie at a minimum 9" OC. For fastener schedule refer to ASTM C1861. Paperback is Asphalt impregnated Type 1, Grade D, Style 2 paper.

Job Name _____
 Contractor _____
 Date _____

Approvals (Signatures or Stamps)