


TRIM-TEX
EXTERIOR SOLUTIONS

ULTRA-LATH®
Submittal Sheet

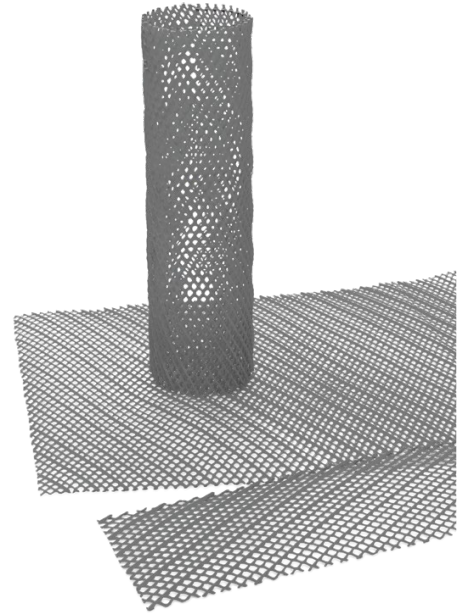

STRIPS	THICKNESS	DIMS.	PCS. PER BOX
PDM6	1/8"	6" x 96"	50
SHEETS	THICKNESS	DIMS.	COVERAGE
PDM2796GRAY	1/8"	27" x 96"	180 sf
ROLLS	THICKNESS	ROLL DIMS.	COVERAGE
PDMR	1/8"	27" x 100'	225 sf

Description: ULTRA-LATH® is an easy-to-use, non-rusting alternative to metal lath for one-coat stucco systems and flooring. With built-in 1/8" self-furring ridges for solid keying and a tough plastic design that resists moisture, chemicals and salt, the gray ULTRA-LATH is a safer, lighter choice than metal – no rust, no cuts, no worries. Available in strips, sheets and rolls.

Advantages: Non-rusting, safer and lighter alternative to metal lath. Unaffected by salt, moisture and chemicals. Compatible with all cement-based products.

Applicable Standards: ASTM C926 and C1063. Flooring TCA F185-14, RH140-14.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods for plastic lath. Not recommended for open framing. Lath to be installed with ribbed side against substrate. Install fasteners to framing members or cementitious substrate a minimum of 6" on center (OC). For fastener schedule refer to ASTM C1861. (NOTE: Since one-coat stucco systems are proprietary and do vary between manufacturers, please refer to individual manufacturer's installation instructions.)

Job Name _____
Contractor _____
Date _____

Approvals (Signatures or Stamps)