

CI/EIFS/Hard Coat

Section: 07240

Vent Screen TRAC™

| Product Number | Description | Foam Thickness | Pieces per Box | |
|----------------|--|---|----------------|----|
| VST-50 | TRAC™ for EIFS systems with double row of drainage holes at the rear of the TRAC™. 2" (51 mm) wide nailing flange with nail attachment holes set at 4" (102 mm) o.c. | 1/2" (13 mm) | 35 | |
| VST-58 | | 5/8" (16 mm) | 35 | |
| VST-75 | | 3/4" (19 mm) | 30 | |
| VST-1 | | 1" (25 mm) | 25 | |
| VST-125 | | 1-3/4" (45 mm) | 20 | |
| VST-15 | | 1-1/2" (38 mm) | 20 | |
| VST-175 | | 1" (25 mm) return flange. | 1-3/4" (45 mm) | 15 |
| VST-2 | | Available without weep holes. | 2" (51 mm) | 15 |
| VST-225 | | To order, add prefix "N". Example: NVST-50. | 2-1/4" (57 mm) | 15 |
| VST-25 | | 2-1/2" (64 mm) | 15 | |
| VST-275 | | 2-3/4" (70 mm) | 10 | |
| VST-3 | | 3" (76 mm) | 10 | |

10' (3 m) Lengths




Application:

A vent screen trac for use with EIFS systems. The VST has a double row of drainage holes that aid in carrying moisture away from the structure. Its 2" (51 mm) wide nailing flange, and the nail holes set every 4" (102 mm) o.c. provide secure attachment. It also provides superior bond of base coat to foam board.

Specifications:

Vent Screen Trac shall be Plastic Components, Inc. # _____.
All exterior accessories shall meet ASTM standards D1784, C1063 and D4216, shall be third party tested and Canadian Code Compliant. They shall be used where specified by the design authority and installed per industry standards.

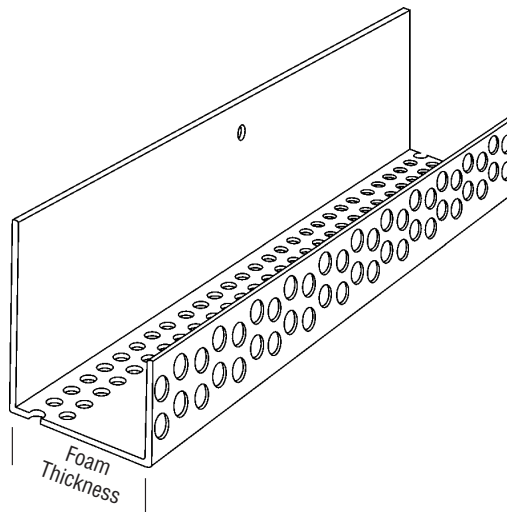

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.



D-33