

Stucco and Plaster

Section: 09200

"Z" Flashing for Floor Line Applications

Product Number	Dimensions/Descriptions	Pieces per Box
SBZ-50	"Z" Flashing 1/2" (13 mm) drip edge for 1/2" (13 mm) board, 3" back flange	30
SBZ-58	"Z" Flashing 1/2" (13 mm) drip edge for 5/8" (16 mm) board, 3" back flange	30
SBZ-75	"Z" Flashing 1/2" (13 mm) drip edge for 3/4" (19 mm) board, 3" back flange	30
SBZ-78	"Z" Flashing 1/2" (13 mm) drip edge for 7/8" (22 mm) board, 3" back flange	30

10' (3 m) Lengths




Application:

Plastic Components "Z" Flashing for joints such as floor line, gable, etc applications. For use at floor line with plywood or other sheathing products. "Z" Flashing is non-rusting and has pre-drilled nail holes.

Specifications:

Z Flashing for Floor Line Applications shall be Plastic Components Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

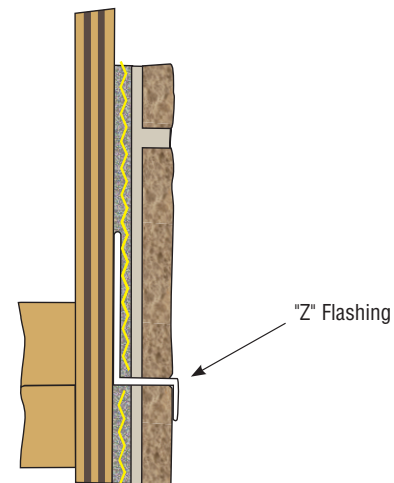

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



PLASTIC **PC**™
COMPONENTS inc.

A-18