# ebuildingproducts.com

## SUBMITTAL: EMBASSY™ FIRE EXTINGUISHER, VALVE & HOSE RACK CABINETS

The Embassy Series is a Decorative, Trimless, Recessed Cabinet Suitable for the Most Upscale Application in our Finest Finishes of Brass, Bronze, Stainless Steel, Aluminum or Painted Steel. All Models Comply with ADA Projection Requirements.

Door & Trim Construction: The 7/8" thick formed cabinet doors are available in #4 satin stainless steel, US10 satin bronze, US3 polished brass, #180 clear anodized aluminum or powder-coated white steel. Doors feature two concealed hinges at top & bottom of door, and roller catch. "V" and "S21" doors can be opened from the bottom of the cabinet using the concealed ABS cup handle in the door. "W "or "L22" door styles have a zinc-plated pull (painted to match brass, color anodized, US10B or bronze finishes) installed approximately 3/4" above lock which is centered top to bottom on the door (no concealed pull). L24 doors have no pull, and are opened by key only.

Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard. Tub forms a 1" flange to cover cut edges of wallboard material. 5900 has shelf 12" from bottom.

**Knockouts:** Models designed for use with Fire Department Valves & Hose Racks - 5500: 2 KO's centered on tub, one on each side, or 9" from top, 4" from back. 5800: 2 KO's on left side only, 4" from top and 4" from bottom, 4" from back. 5900: 2 KO's, on each side, 6" from bottom, 4-1/4" from back. 5900 available without shelf to allow for lower mounting height of piping to meet NFPA10 and ADA.

#### STEP 1: SELECT MODEL NUMBER, MATERIAL AND QUANTITY ON CHART (refer to chart on pg 2)

PLEASE DOWNLOAD MOST CURRENT SUBMITTAL FROM WEBSITE BEFORE ORDERING

Determine Tub I.D. according to size most suited for extinguisher and wall opening

Determine Tub I.D. decording to size most suited for exti	riguistici and wan opening.								
STEP 2: SELECT DOOR STYLE	(Check one box below)			6	5654V10				
V Vertical Duo with Concealed Pull in Door	Vertical Duo with Concealed Pull in Door  S21 Solid with Concealed Pull in Door  L24 Solid Door with Cam Lock & No Pull								
W Vertical Duo with SAF-T-LOK™ & Pull Handle	L22 Solid with SAF-T-LOK	& Pull Handle			Concealed Pull				
STEP 3: <u>SELECT DOOR GLAZING</u>	(Check one box below)								
10 Clear Acrylic	16 Gray Acrylic			5614W10 Steel with					
13 Clear Wire Glass with Safety Film	17 Clear Tempered Glass			Pull Handle and					
15 Bronze Acrylic	18 Laminated Safety Glass	Saf-T-Lok							
STEP 4: OPTIONAL FEATURES AT ADDED COST (S	ELECT ANY)								
Door Finish Options -(Specialty Finishes Have Pulls to match)	Lettering Options		Other Options						
Dark Bronze Anodized Aluminum Door:	Black Vertical "Fire Extingui	sher" Diecut Letters LDCVBFE	Optional Color Tul	b Red Black Other					
Optional Color— Painted Steel Door; code	Red Vertical "Fire Extinguis	her" Diecut Letters LDCVRFE	Futura "Fire" Hand	leRed MillWhite					
#6 #7 #8 Stainless Steel Door		isher" Diecut Letters LDCVWFE	Flush Pull in Cente	er of Door (PRH)					
US9 Polished Bronze Door - Clear-coated	Black Horizontal "Fire Exting	Alarm							
US4 Satin Brass Door - Clear-coated	Red Horizontal "Fire Extingu	rm							
View Bronze & Brass Finishes Online	White Horizontal "Fire Extir	Attach							
Stainless Steel Tub #4 finish	Etched Lettering on Glass -	Attach Separate Submittal to order	Separate Submitta	l to order					
		Dietributer	<u> </u>	Ougntity:					
		Distributor:		Quantity:					
IL INDUSTRIES		Contractor:	pproved By:						
777 ,= 110001111110		Model #:	Architect:						

2/1/2023

Project:



© 2023 Activar Construction Products Group, Inc


Date:

PAGE 1 OF 2

# ebuildingproducts.com

### SUBMITTAL: EMBASSY FIRE EXTINGUISHER CABINETS



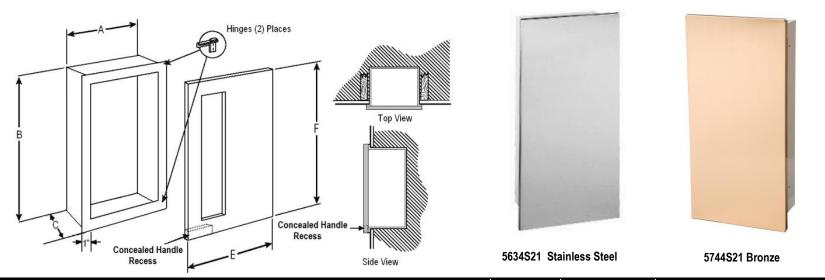

TRIM & DOOR MATERIAL & SERIES								TUB I.D. in Inches		DOOR O.D.		WALL OPENING		NING							
Qī	YSTEEL	QTY	ALUMI- NUM	QTY	STAIN- LESS*	QTY	US 10 BRONZE	QTY	US10B BRONZE		US 3 BRASS	Α	В	С	E	F	w	Н	D	RECOMMENDED HOSE, RACK & EXTINGUISHER	
FIRE EXTINGUISHER CABINETS																					
	5614		5624		5634		5644		5684		5654	10-1/2	24"	5-3/4	12 3/4	26 1/4	11 1/2	25	5 7/8	Cosmic & Galaxy 2.5-10 Sentinel 5, Mercury 2.5-5	
	5714		5724		5734		5744		5784		5754	16	32	7-3/4	18 1/4	34 1/4	17	33	7 7/8	Any **Cosmic, **Galaxy, Mercury, Saturn, Nebu- la or Grenadier P, Sentinel 5-15,	
								FIRI	E DEPART	MENT	VALVE, I	OSE &	EXT	NGUIS	HER C	ABINET	S				
	5514		5524		5534		5544		5584		5554	18	18"	7-3/4	20 1/4	20 1/4	19	19	7 7/8	1-1/2" or 2-1/2" Fire Department Valve.  *Left & Right K.O.'s Centered One on each Side or 9" from top, 4" from Bottom & Back.	
	5814		5824		5834	_		_		_		32	32	7 3/4	34 1/4	34 1/4	33	33	7 7/8	1-1/2" or 2-1/2" Rack Unit & 2-1/2" Fire Dept Valve or Extinguisher. *2 Left Side K.O.'s 4" from back, top & bottom.	
	5914		5924		5934		5944		5984		5954	16	40	8 3/4	18 1/4	42 1/4	17	41	8 7/8	2-1/2" Fire Dept. Valve & Fire Extinguisher. Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5-10, Nebula 270 *Left & Right K.O.'s 6" from Bottom & 4-1/4" from Back. Shelf Located 12" From Bottom	

<sup>\*\*</sup>Cosmic & Galaxy 20 must be mounted on the back of the cabinet tub. \* Knockouts Not Available on Stainless Tubs.

ADA Cabinet Mounting Height: Standard Pull on W or L22 Door Styles with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet. Standard Pull with No Lock are Centered on Door.