




IntexForms, Inc.

ACCESS PANELS

Actual photo of half finished panel.

Unpainted natural gypsum



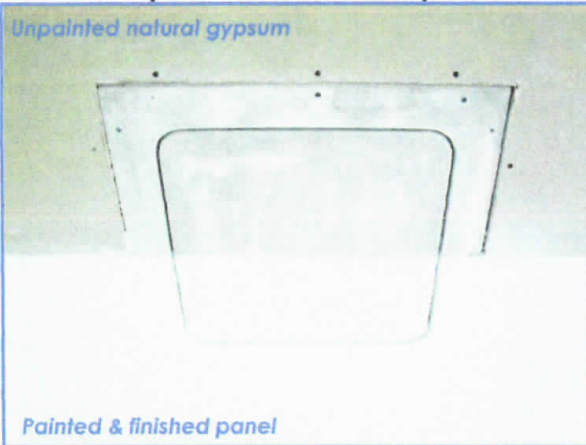


Painted & finished panel

- Blends in with Ceiling
- Easy to Install

SIZES AVAILABLE

9" OPENING
12" OPENING
18" OPENING
24" OPENING
30" OPENING
24"x30" OPENING
18"x36" OPENING

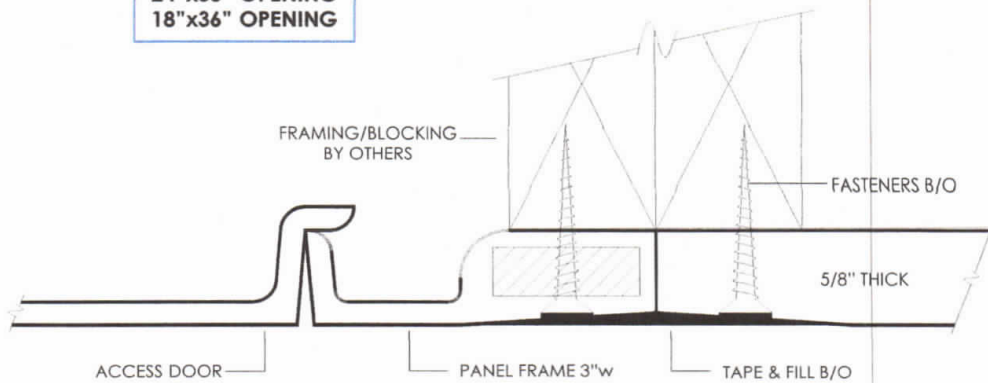
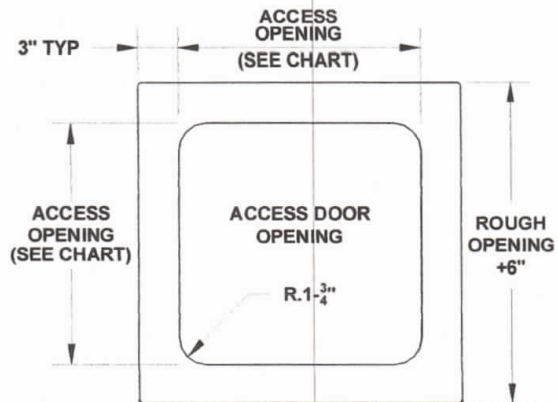
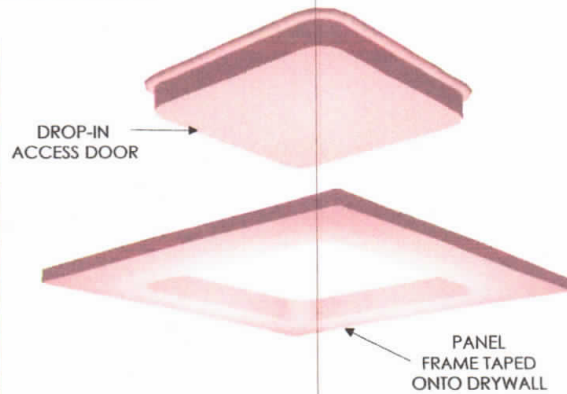


TYPICAL ACCESS PANEL JOINT DETAIL



Custom Glassfiber Reinforced Products

Lift & Shift Access Panel Square Door Corners

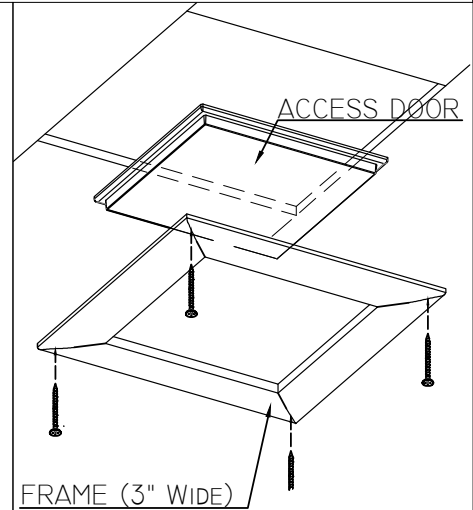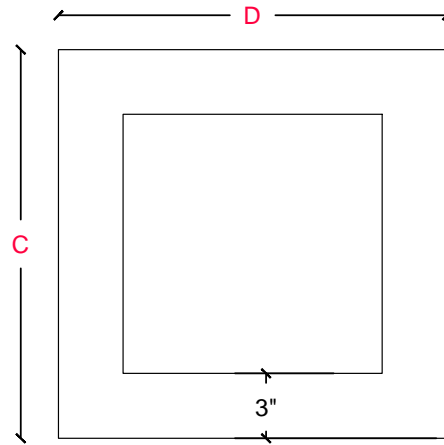

PART #	DOOR OPENING		CENTER OF FRAMING		WEIGHT
	A	B	C	D	
APS6X6	6"	6"	12"	12"	2.5 lbs.
APS8X8	8"	8"	14"	14"	3 lbs.
APS9X9	9"	9"	15"	15"	4 lbs.
APS10X10	10"	10"	16"	16"	4.5 lbs.
APS12X12	12"	12"	18"	18"	5.75 lbs.
APS14X14	14"	14"	20"	20"	7 lbs.
APS16X16	16"	16"	22"	22"	8.5 lbs.
APS18X18	18"	18"	24"	24"	10 lbs.
APS20X20	20"	20"	26"	26"	12 lbs.
APS24X24	24"	24"	30"	30"	15.5 lbs.
APS30X30	30"	30"	36"	36"	22.5 lbs.
APS36X36	36"	36"	42"	42"	30.75 lbs.
APS42X42	42"	42"	48"	48"	40 lbs.
APS48X48	48"	48"	52"	52"	44 lbs.





Access (Ceiling) Panel Installation Procedures

1. Size Requirements

Intex A-panels are defined by the opening size, rough opening dimensions are an additional 6" added to the opening size (see attached drawing). Standard A-Panels are push out type, hinges and latches can be attached by the installer. Custom sizes are available. Standard Panels are gypsum based, however, cement based exterior panels can be special ordered. - Contact IntexForms, Inc. for more information.

Standard A-Panel Sizes, Approximate

A. 18" x 36" door opening	20 lbs.
B. 30" x 30" door opening	22 lbs.
C. 24" x 24" door opening	16 lbs.
D. 18" x 18" door opening	11 lbs.
E. 12" x 12" door opening	9 lbs.
F. 9" x 9" door opening	6 lbs.

Notes:

1. Freight & Applicable Sales Tax Extra.
2. Volume discounts available for Suppliers.

2. Fasteners & Attachments (by installer)

Intex A-Panels are installed with standard supplies; screws are #6 buglehead, and joints use standard tape and joint compound. The panel has an edge thickness to accommodate 5/8" drywall, therefore, shimming may be required if adjacent material is not 5/8" drywall (see attached drawing).

3. Finishing (by installer)

4. Framing, Studs or Blocking (by installer)

Substrate material is determined by job-site conditions. The panel does not require regular framing, but can be connected to adjacent drywall using blocks or studs.

5. Physical Properties

A. Shell Thickness	1/8" to 3/16"
B. Fastener Test Pull Out (wood stud)	525-lbs. avg.
C. Fastener Test Pull Out (metal stud)	215-lbs. avg.
D. Fastener Push Through Test	350 lbs. avg.
E. Fuel Contribution (ASTM E84-80)	0
F. Flame Spread (ASTM E84-80)	0
G. Smoke Index (ASTM E84-80)	0
H. Combustion (ASTM E84-80)	Non Combustible
I. Class A Non-Rated	