

TRIM-TEX™

EXTERIOR SOLUTIONS

Continuous Soffit Vent for Foam Board Submittal Sheet



STOCK NO.	A SIZE	AIRFLOW/ LF	LENGTH	PCS. PER BOX
548-1	1"	14 sq in.	10'	10
548-15	1½"	14 sq in.	10'	8

Description: Designed for use with 1" and 1½" foam board. Vent holes ⅛" in diameter, and vented area is 2 ⅝" wide. Its extra-wide mounting flanges make attachment to sheathing easier, while its wide flange has ⅛" stops with grooves to provide positive bond of the base coat and mesh assuring proper finish thickness.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

Date _____

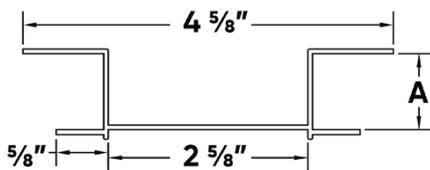

Approvals (Signatures or Stamps)