

Stucco and Plaster

Section: 09200

"V" Control Joint

| Product Number | Ground | Dimensions/Descriptions | Pieces per Box |
|----------------|--------------|---|----------------|
| 2038 | 3/8" (10 mm) | "V" control joint 4-1/8" (105 mm) overall width with perforated flanges. | 35 |
| 2050 | 1/2" (13 mm) | | 35 |
| 2058 | 5/8" (16 mm) | | 35 |
| 2075 | 3/4" (19 mm) | | 30 |
| 2078 | 7/8" (22 mm) | | 25 |
| 2100 | 1" (25 mm) | | 20 |





10' (3 m) Lengths
Connector clips included.

Application:

Should be used in any application where a surface area is more than 144 square feet. The wide flange allows for more "keying" of the stucco. The "eyebrows" allow for the stucco to key to the "V". Vertical joints should be attached to a stud where necessary.

Specifications:

Control Joints shall be Plastic Components, Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063, C1861 and D4216. They shall be used where specified by the design authority and installed per industry standards.

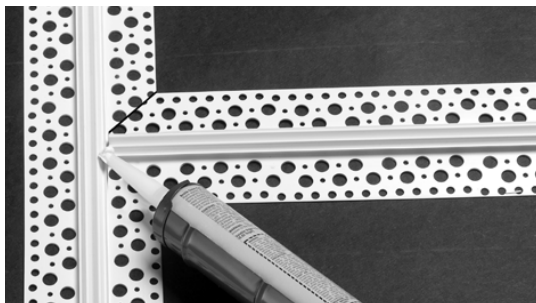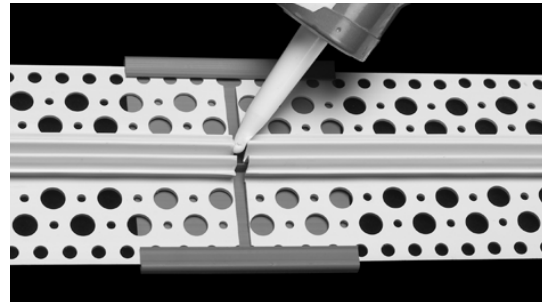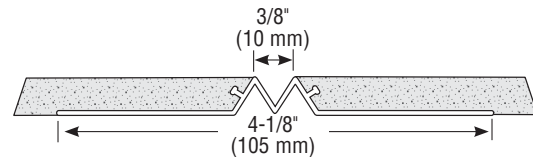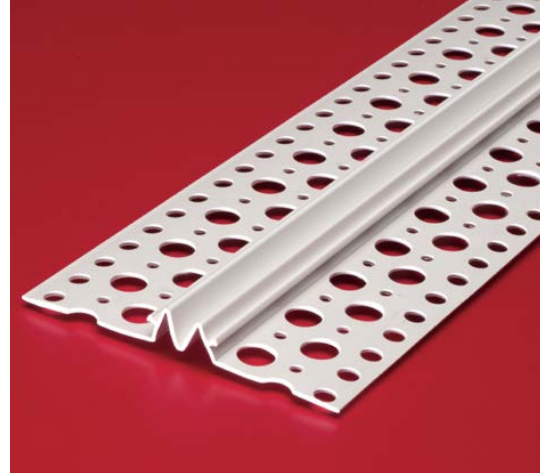

All butt joints, intersections and ends shall be caulked at the time of installation using an elastomeric sealant, such as Plastic Components' Ultra-Tech™ (PC-ULTW).



A-22