



ASVB

VALVE BOXES

Surface Mount

Application

- Provides easy access to valves and controls that extend outside of the finished wall, needing protection by an enclosed box.

Product Features

- The depth of the valve box can be modified to meet all the valve and control requirements.
- When required, vision panels, louvers, engraved plates can be supplied, along with special holes for pipes or conduits.

ASVB Valve Box Specifications:

Material: Stainless Steel or Steel: door & box

Door: 16 gauge, overlaps box, providing for a tight secure fit

Box: 16 gauge, fully enclosed, completely attached to frame.
When required box can be made with open back.

Hinge: Continuous, exposed piano hinge

Standard Latch: Cylinder lock & key. Also available:

Slotted Screwdriver Cam Latch, allen head cam latch, spanner head cam latch, flush paddle handle, thumb turn latch

Finish: Stainless Steel: #4 satin polish. Steel: 5 stage iron phosphate preparation with prime coat of White alkyd baking enamel


ASVB STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Opening	Weight per Door	
Inches	mm		lbs.	kg.
8 x 8 x 4	203 x 203 x 102	1	5.2	2.4
8 x 8 x 6	203 x 203 x 152	1	6.4	2.9
8 x 8 x 8	203 x 203 x 203	1	7.3	3.3
12 x 12 x 4	305 x 305 x 102	1	9.2	4.2
12 x 12 x 6	305 x 305 x 152	1	11.0	5.0
12 x 12 x 8	305 x 305 x 203	1	12.7	5.8

Wall opening is W + 3/8" (9 mm)

For detailed specifications see submittal sheet

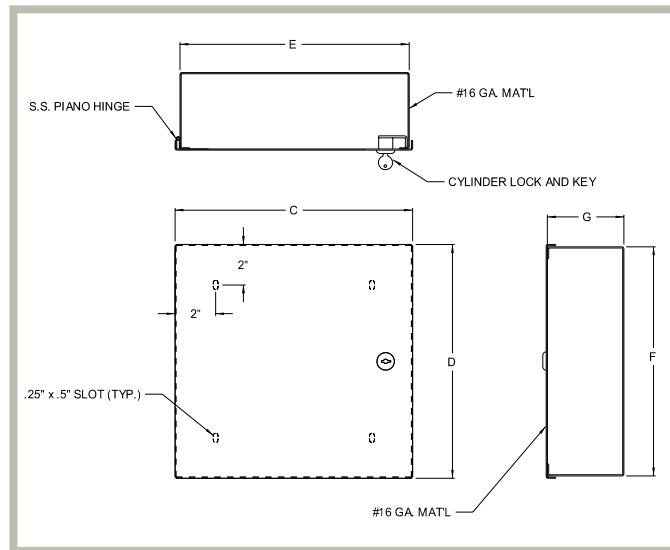

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.