



# FB-5060-DW

## FIRE RATED UNINSULATED

- for Drywall walls

### Application

- For drywall walls applications.
- Designed to maintain continuity in a 2 hour fire rated wall, when temperature rise is not a factor

### Product Features

- Concealed hinge
- Self-closing
- Self-Latching
- Drywall taping bead
- Inside latch release
- Available with a removable door panel

### FB-5060-DW Access Door Specifications:

Material: Steel or Stainless Steel

Door: 16 gauge

Mounting Frame: 16 gauge. Flush to frame with reinforced edges, drywall taping bead flange

Hinge: Concealed

Fire Rating (Walls): UL — 1-1/2 hour "B" label. ULC — 2 hour "B" label. (optional) Max size 36 x 48

Standard Latch: Universal self-latching bolt, operated by either a knurled knob or flush key. When master keying is required, doors can be prepared for rim or mortise cylinder locks.

Finish: Steel: 5 stage iron phosphate preparation with prime coat of White alkyd baked-on enamel

Stainless Steel: Type 304 - #4 satin polish optional


### FB-5060-DW STANDARD SIZES

(other sizes available upon request)

| Nominal Door Size W&H |            | Latches | Weight per Door |      |
|-----------------------|------------|---------|-----------------|------|
| Inches                | mm         |         | lbs.            | kg.  |
| 8 X 8                 | 203 X 203  | 1       | 4.8             | 2.2  |
| 10 X 10               | 254 X 254  | 1       | 6.0             | 2.7  |
| 12 X 12               | 305 X 305  | 1       | 7.6             | 3.4  |
| 14 X 14               | 355 X 355  | 1       | 8.9             | 4.0  |
| 16 X 16               | 406 X 406  | 1       | 10.6            | 4.8  |
| 18 X 18               | 457 X 457  | 1       | 12.6            | 5.7  |
| 22 X 30               | 559 X 759  | 1       | 23.8            | 10.8 |
| 22 X 36               | 559 X 914  | 2       | 26.8            | 12.2 |
| 24 X 24               | 610 X 610  | 1       | 18.9            | 8.6  |
| 24 X 30               | 610 X 762  | 2       | 24.0            | 10.9 |
| 24 X 36               | 610 X 914  | 2       | 28.3            | 12.8 |
| 24 X 48               | 610 X 1219 | 2       | 38.5            | 15.2 |
| 30 X 30               | 762 X 762  | 2       | 26.5            | 12.0 |
| 36 X 36               | 914 X 914  | 2       | 36.3            | 16.5 |
| 36 X 48               | 914 X 1220 | 2       | 45.8            | 20.8 |

Wall opening is W + 3/8" (9 mm)

For detailed specifications see submittal sheet

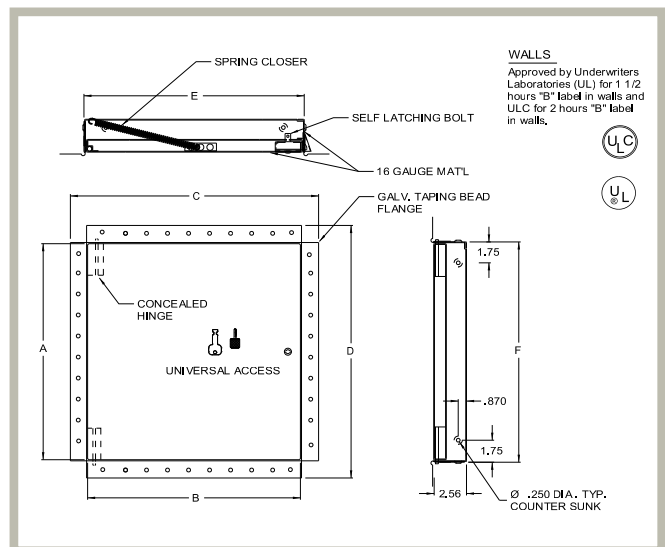

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.