



HD-5070-F

DUCT DOORS for Ductboard/Fiberglass ducts

Application

- Economical access to fiberglass ducts

Product Features

- These doors are for use in low to medium pressure fiberglass ducts
- Hinged door panel

Options

- Aluminum, stainless steel

HD-5070F "Hinged" Fiberglass Doors Specifications:

Material: Galvanized steel

Door: 24 gauge


Mounting Frame: 24 gauge

Gasketing: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame and also between frame and duct.

Insulation: 1" Micro-AIRC M/F TYPE-475 R value 7.7

Hinge: Continuous aluminum piano hinge

Latch: Self tightening, hand operated cam latch

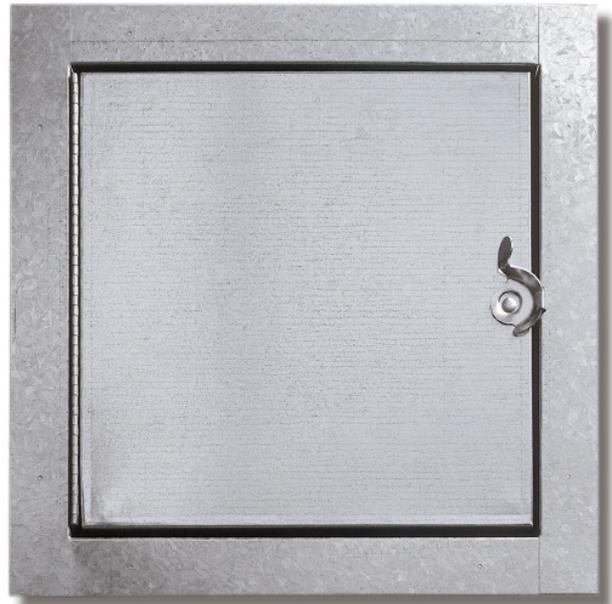


HD-5070-F STANDARD SIZES

(other sizes available upon request)

| Nominal Door Size W&H | | Latches | Weight per Door | |
|-----------------------|-----------|---------|-----------------|-----|
| Inches | mm | | lbs. | kg. |
| 6 x 6 | 152 x 152 | 2 | 1.0 | 0.5 |
| 8 x 8 | 203 x 203 | 2 | 1.25 | 0.6 |
| 10 x 10 | 254 x 254 | 2 | 2.0 | 0.9 |
| 12 x 12 | 304 x 304 | 2 | 2.5 | 1.1 |
| 14 x 14 | 356 x 356 | 2 | 3.25 | 1.5 |
| 16 x 16 | 406 x 406 | 2 | 4.0 | 1.8 |
| 18 x 18 | 457 x 457 | 2 | 5.5 | 2.5 |
| 20 x 20 | 508 x 508 | 2 | 9.0 | 4.1 |
| 24 x 24 | 610 x 610 | 2 | 12.0 | 5.4 |

Duct opening is same size as normal door opening
For detailed specifications see submittal sheet

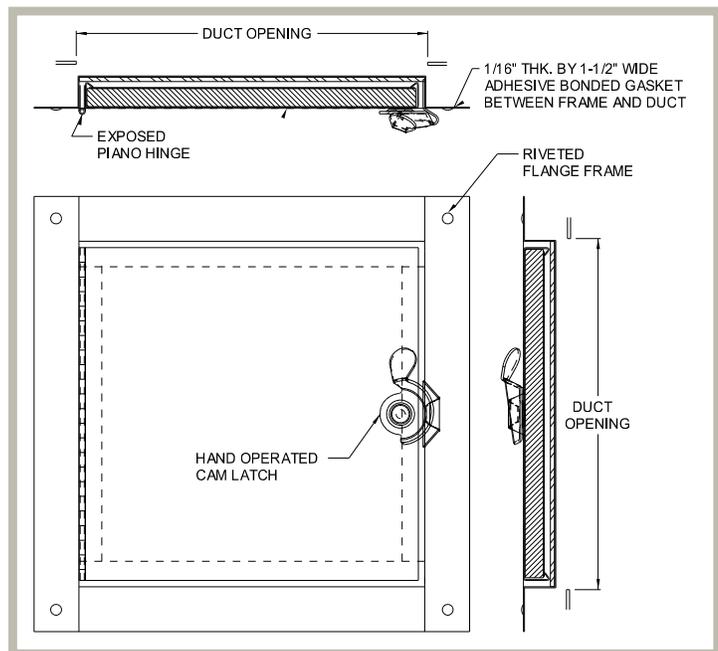

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.