


WD - 8000 PRODUCT INFORMATION

WD-8000

DUCT & SPECIALTY DOORS

Walk Through Door

Application

- Designed to provide convenient walk through access to duct work interiors & air handling units
- Low to medium pressure systems and plenums

Product Features

- Heavy duty construction, along with a continuous hinge and compression handles
- Optional Features: Removable Door Panel / Vision Panel / High Pressure Units / Key Operated Handles

WD-8000 Access Door Specifications:

Material: Galvanized steel, also available in Aluminum and Stainless Steel

Door: 22 gauge

Mounting Frame: Double panel frame is 1 15/16" wide x 1 1/2" deep extruded aluminum with mitred corners

Gasket: 1/8" thick x 1/2" wide closed cell neoprene gasketing between door and frame

Hinge: Continuous steel piano hinge—opens 180 degrees

Insulation: Door panel filled with 1" thick fiberglass insulation - 4 R value

Standard Latch: Dual acting compression handles—operable from both sides

Units 48" high and under to have 2 handles

Units over 48" high to have 3 handles

Finish: Mill finish

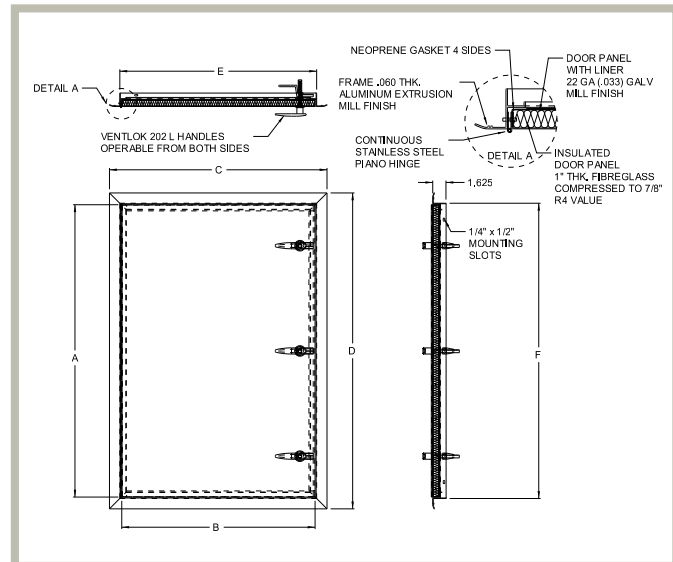

WD-8000 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Weight per Door	
inches	mm	lbs.	kg.
24 x 36	610 x 914	21.0	9.5
24 x 48	610 x 1219	28.2	12.8
24 x 60	610 x 1524	33.8	15.3
24 x 72	610 x 1829	41.7	18.9
30 x 36	762 x 914	25.3	11.5
30 x 48	762 x 1219	36.2	16.4
30 x 60	762 x 1524	42.5	19.3
30 x 72	762 x 1829	80.6	36.6

Wall opening is normal door size plus +3/8" (9mm)

For detailed specifications see submittal sheet



This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.