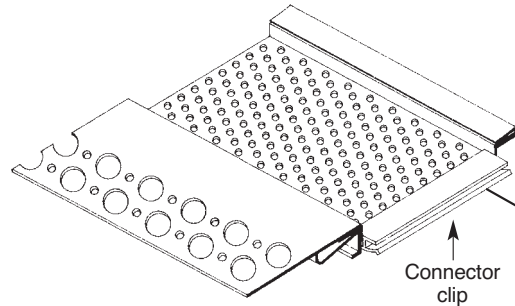


Stucco and Plaster

Section: 09200

Continuous Soffit Vent with 90° Leg

Product Number	Ground	Dimensions/Descriptions	Pieces Per Box
551-50	1/2" (13 mm)	Three part soffit vent with 90° leg. Standard 2-5/8" (67 mm) vent included.	13
551-58	5/8" (16 mm)	1-3/4", 3", 4" or 6" (44, 76, 102 or 152 mm) vent may be substituted. Up to 16 sq. in. (10,323 sq. mm) of free air flow per linear ft.	13
551-75	3/4" (19 mm)		13
551-78	7/8" (22 mm)		13

10' (3 m) Lengths • **Product ships unassembled.**


Application:

Acts as a vented bridge between a horizontal soffit and vertical wall junction. The stucco stop is placed on the horizontal soffit side and the angled 90° leg returns up the vertical wall. Comes standard with a 2-5/8" (67 mm) wide vent; 1-3/4", 3", 4", or 6" (44 mm, 76 mm, 102 mm, or 152 mm) vent may be substituted upon request. Connector clips included.

Specification:


Soffit Vent with 90° Leg shall be Plastic Components, Inc. #_____. All exterior accessories shall be of PVC material conforming to ASTM standards D1784, C1063 and D4216. They shall be used where specified by the architect and installed per industry standards.




To change direction,
remove and reinstall the 90° Leg

90° Leg
facing down

F551

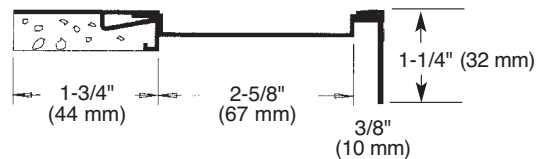

90° Leg
facing up

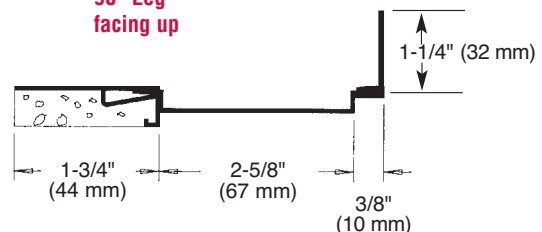

Caulk all butt joints, intersections and ends.



PLASTIC PCTM
COMPONENTS inc.

info@ebuildingproducts.com

855-832-8453