

SUBMITTAL: PANORAMA™ FIRE-FX2™ STAINLESS STEEL FIRE RATED EXTINGUISHER CABINETS

The Panorama Cabinet Features a Frameless Door of Clear Polycarbonate or Opaque Textured Acrylic with Many Lettering Options

Door & Trim Construction: Flush acrylic cabinet doors are attached by a continuous hinge and equipped with zinc-plated handle and roller catch. 1-3/4" trim on cabinet has #4 stainless steel finish.

Trim Style & Depth: Trimless Recessed - See Separate Submittal, Recessed 3/8" flat trim, Semi Recessed - 1-1/4", 1-1/2" Square Edge or 2-1/2", 3", 4", 4-1/2" Rolled Edge (4" has recessed pull).

Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard. Tub forms a flange to cover cut edges of wallboard material. Fire-resistant material is attached to the exterior of the tub.

Fire-Rated Option Available: Yes - See separate Submittal Form.

Fire Rating: Fire-FX2™ cabinets are UL listed and labeled as an approved membrane penetration firestop system for up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/ULC-S115, when properly installed in a wall assembly according to installation instructions.

STEP 1: SELECT MODEL NUMBER, MATERIAL AND QUANTITY ON CHART (refer to chart on pg 2)

A. Determine Trim Style according to wall depth. B. Determine Tub I.D. according to size most suited for extinguisher and wall opening.

STEP 2: SELECT DOOR STYLE

(Check one box below)

☐ C70 Clear 3/16" Unlettered Smooth Polycarbonate

☐ P Identity: 3/16" Textured Obscure Acrylic with Lettering

☐ C71 Clear 3/16" Unlettered Smooth Polycarbonate & Saf-T-Lok™

☐ Q Identity: 3/16" Textured Obscure Acrylic with Lettering & Saf-T-Lok

STEP 3 - P&Q DOORS SELECT LETTERING STYLE View lettering styles on page 2

☐ 40 Vert, Black Bkgd, White Lettering	☐ 45 Horiz, Black Bkgd, White Lettering	☐ 50 Ascend, Black Bkgd, White Lettering
☐ 41 Vert, Red Bkgd, White Lettering	☐ 46 Horiz, Red Bkgd, White Lettering	☐ 51 Ascend, Red Bkgd, White Lettering
☐ 42 Vert, White Bkgd, Black Lettering	☐ 47 Horiz, White Bkgd, Black Lettering	☐ 52 Ascend, White Bkgd, Black Lettering
☐ 43 Vert, White Bkgd, Red Lettering	☐ 48 Horiz, White Bkgd, Red Lettering	☐ 53 Ascend, White Bkgd, Red Lettering

STEP 4: OPTIONAL FEATURES AT ADDED COST (SELECT ANY)

☐ Futura "Fire" Handle ____ Mill Aluminum (PUF) ____ Red ____ White

☐ Flush Pull Handle for P and Q Door Styles (PRH)

☐ Polished Chrome Pull (PUCH)

☐ Other Stainless Finish: ____ #6 ____ #7 ____ #8

☐ (CA) Commander Alarm

☐ (BA) Brigadier Alarm

☐ Optional Tub Color: ____ Black ____ Red

☐ #4 Stainless Tub

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

 JL INDUSTRIES	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:
5/30/22		



PAGE 1 OF 2



1036C70FX2



1038Q43FX2

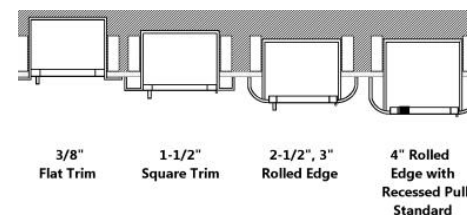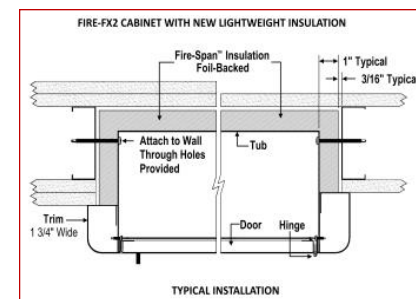

SUBMITTAL: PANORAMA STAINLESS FX2 EXTINGUISHER CABINETS

PAGE 2 OF 2

TRIM & DOOR SERIES #			Tub I.D.			Frame O.D.		FX Wall Opening			Fits
QTY	Model	Trim Style (in)	A	B	C	E	F	W	H	D	Extinguishers
	8135	Flat trim	9	18	5 1/2	12 3/8	21 3/8	11 5/16	20 5/16	6 7/16	Cosmic & Galaxy 2 1/2-5-1/2 Mercury 2 1/2-5
	8136	1 1/2 Square	9	18	5 1/2	12 3/8	21 3/8	11 5/16	20 5/16	5 3/16	
	8137	2 1/2 Rolled	9	18	5 1/2	12 3/8	21 3/8	11 5/16	20 5/16	4	
	1835	Flat trim	10 1/2	24	5 1/2	13 7/8	27 3/8	12 13/16	26 5/16	6 7/16	Cosmic & Galaxy 2 1/2-5-1/2 Mercury 2 1/2-5
	1836	1 1/2 Square	10 1/2	24	5 1/2	13 7/8	27 3/8	12 13/16	26 5/16	5 3/16	
	1837	3 Rolled	10 1/2	24	5 1/2	13 7/8	27 3/8	12 13/16	26 5/16	3 5/8	
	1832	4 Rolled/Flush Pull	10 1/2	24	5 1/2	13 7/8	27 3/8	12 13/16	26 5/16	2 7/8	
	1838	4 1/2 Rolled	10 1/2	24	5 1/2	13 7/8	27 3/8	12 13/16	26 5/16	2 3/16	Cosmic & Galaxy 2 1/2-10 Mercury 2 1/2-5, Sentinel 5
	1035	Flat trim	10 1/2	24	6	13 7/8	27 3/8	12 13/16	26 5/16	6 15/16	
	1036	1 1/2 Square	10 1/2	24	6	13 7/8	27 3/8	12 13/16	26 5/16	5 11/16	
	1037	3 Rolled	10 1/2	24	6	13 7/8	27 3/8	12 13/16	26 5/16	4	
	1032	4 Rolled/Flush Pull	10 1/2	24	6	13 7/8	27 3/8	12 13/16	26 5/16	3 3/8	
	1038	4 1/2 Rolled	10 1/2	24	6	13 7/8	27 3/8	12 13/16	26 5/16	2 11/16	Any †Cosmic, †Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 & 10, Nebula 270
	2035	Flat trim	12	27	7 3/4	15 3/8	30 3/8	14 5/16	29 5/16	8 11/16	
	2036	1 1/4 Square	12	27	7 3/4	15 3/8	30 3/8	14 5/16	29 5/16	7 11/16	
	2037	2 1/2 Rolled	12	27	7 3/4	15 3/8	30 3/8	14 5/16	29 5/16	6 7/16	
	2032	4 Rolled/Flush Pull	12	27	7 3/4	15 3/8	30 3/8	14 5/16	29 5/16	5 1/8	
	2038	4 1/2 Rolled	12	27	7 3/4	15 3/8	30 3/8	14 5/16	29 5/16	4 7/16	Any †Cosmic, †Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5-15, Nebula 250, 270, 272
	3035	Flat trim	16	32	7 3/4	19 3/8	35 3/8	18 5/16	34 5/16	8 11/16	
	3036	1 1/4 Square	16	32	7 3/4	19 3/8	35 3/8	18 5/16	34 5/16	7 11/16	
	3037	2 1/2 Rolled	17	34	9	20 3/8	38 3/8	18 5/16	34 5/16	6 7/16	
	3032	4 Rolled/Flush Pull	16	32	7 3/4	19 3/8	35 3/8	18 5/16	34 5/16	5 1/8	
	3038	4 1/2 Rolled	16	32	7 3/4	19 3/8	35 3/8	18 5/16	34 5/16	4 7/16	Two each of: any Cosmic, Galaxy, Mercury, Saturn or Grenadier P *, Sentinel 5
	4035	Flat trim	20	27	7 3/4	23 3/8	30 3/8	22 5/16	29 5/16	8 11/16	
	4036	1 1/4 Square	20	27	7 3/4	23 3/8	30 3/8	22 5/16	29 5/16	7 11/16	
	4037	2 1/2 Rolled	20	27	7 3/4	23 3/8	30 3/8	22 5/16	29 5/16	6 7/16	
	4032	4 Rolled/Flush Pull	20	27	7 3/4	23 3/8	30 3/8	22 5/16	29 5/16	5 1/8	
	4038	4 1/2 Rolled	20	27	7 3/4	23 3/8	30 3/8	22 5/16	29 5/16	4 7/16	

* 4" Rolled models have recessed pull for "P" and "Q" Doors and standard pull for "C" Styles

- Meets ADA Cabinet Projection Req.

† 20 lb Cosmic and Galaxy must be mounted on back of tub

ADA Cabinet Mounting Height: Standard Pull on C71 and Q Style Doors with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet. Standard Pull with No Lock, or Flush Pull are Centered on Door.



1832P48FX2—Flush Pull


Lightweight
Insulation

PANORAMA "P" & "Q" DOOR GLAZING STYLES

