



RECESSED ACCESS DOOR FOR EXTERIOR CEILINGS

GFRC-RH

GLASS FIBER REINFORCED CEMENT RADIUS CORNER - HINGED

Application

Glass fiber reinforced cement, ceiling access doors are designed to blend seamlessly into exterior soffits/ceilings. The hinged feature allows this door to be installed in walls.

Product Features

- Portland Cement, Fiber, Post Consumer Recycled Glass
- European Angle Hinges
- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant

GFRC-RH Access Door Specifications:


- Shell Thickness = .125" .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

GFRC-RH STANDARD SIZES

(Special sizes available upon request)

Door Size	Ceiling Opening	Weight
Inches (mm)	Inches (mm)	LBS (kg)
9 x 9 (229 x 229)	15 x 15 (381 x 381)	6.0 (2.73)
12 x 12 (305 x 305)	18 x 18 (457 x 457)	9.0 (4.09)
16 x 16 (406 x 406)	22 x 22 (559 x 559)	10.0 (4.53)
18 x 18 (457 x 457)	24 x 24 (610 x 610)	11.0 (5.0)
24 x 24 (610 x 610)	30 x 30 (762 x 762)	16.0 (7.27)

For detailed specifications see submittal sheet

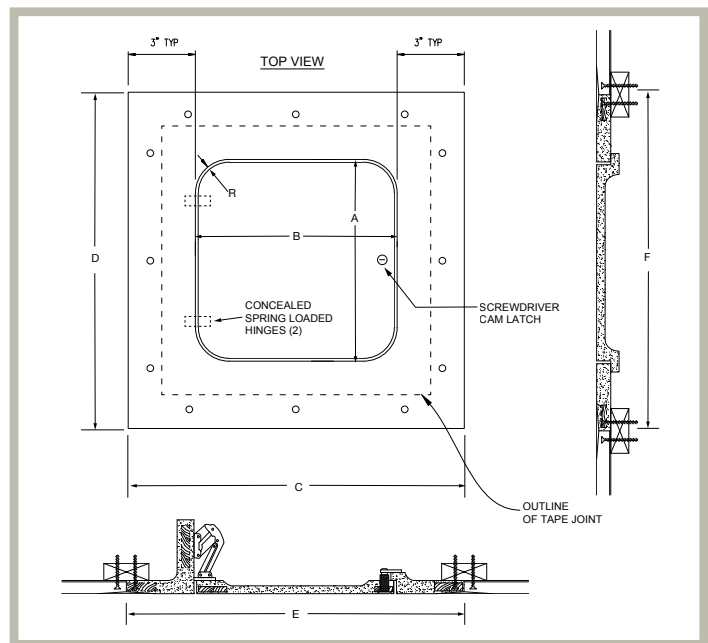



RECESSED ACCESS DOOR FOR EXTERIOR CEILINGS

GFRC-SH

GLASS FIBER REINFORCED CEMENT SQUARE CORNER - HINGED

Application

Glass fiber reinforced cement, ceiling access doors are designed to blend seamlessly into exterior soffits/ceilings. The hinged feature allows this door to be installed in walls.

Product Features

- Portland Cement, Fiber, Post Consumer Recycled Glass
- European Angle Hinges
- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant

GFRC-SH Access Door Specifications:

- Shell Thickness = .125" .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

GFRC-SH STANDARD SIZES

(Special sizes available upon request)

Door Size	Ceiling Opening	Weight
Inches (mm)	Inches (mm)	LBS (kg)
9 x 9 (229 x 229)	15 x 15 (381 x 381)	6.0 (2.73)
12 x 12 (305 x 305)	18 x 18 (457 x 457)	9.0 (4.09)
16 x 16 (406 x 406)	22 x 22 (559 x 559)	10.0 (4.53)
18 x 18 (457 x 457)	24 x 24 (610 x 610)	11.0 (5.0)
24 x 24 (610 x 610)	30 x 30 (762 x 762)	16.0 (7.27)

For detailed specifications see submittal sheet

