
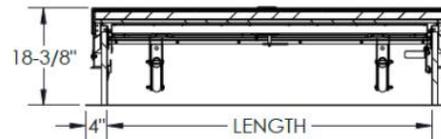
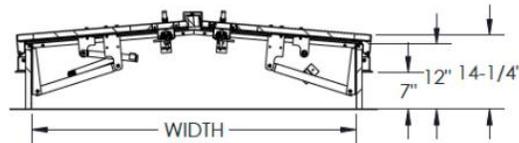
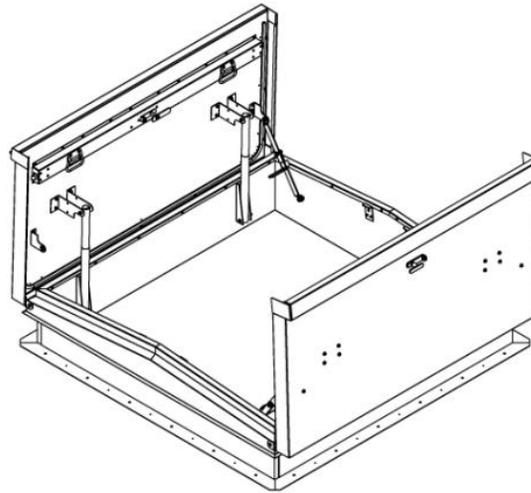


## ROOF ACCESSORIES—DURA-HATCH EQUIPMENT SERIES—REH

Double leaf steel or aluminum equipment hatches are ideal for equipment installation and servicing from the roof. Now, with R6 polyisocyanurate insulation and durable factory finish powder coat.

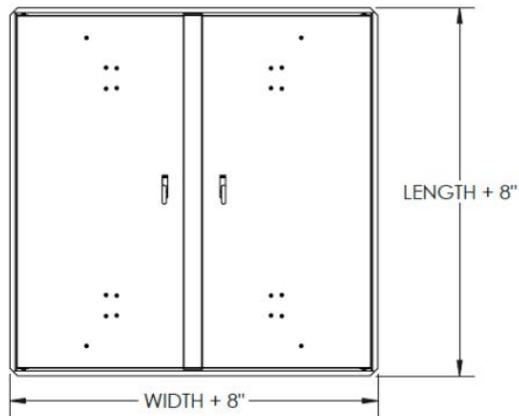

### SPECIFICATIONS:

**Material:** Steel- 14 gauge galvalneal steel curb and cover with 22 gauge galvalneal steel cover liner. Aluminum—11 gauge aluminum curb and cover with 18 gauge aluminum cover liner.

**Finish:** Powder coat gray texture on steel, powder coat silver texture on aluminum.

**Gasket:** Weatherproof EPDM sponge rubber adhesive-backed seal

**Insulation:** 1" polyisocyanurate (R-6) on curb and in cover

**Hinges:** Heavy-duty galvalneal steel or aluminum hinge with bolt pin

**Hold-Open Arm:** Clear zinc-plated steel hold-open arm

**Latches:** Two point universal spring latches on each cover with exterior and interior handles

**Spring:** Pressure intensifiers with compression springs provide lift assistance

**Sizes:** Minimum: 48" x 48" Maximum: 72" x 96"

**Clear Opening:** Minus 8" on width and minus 8" on length

### ACCESSORIES SOLD SEPARATELY:

Bolt-on Safety Railing (RSHWB)



**DUR-RED PRODUCTS**

9702 Newton Av S. Bloomington, MN 55431

© 2025 Activar Construction Products Group, Inc.

Distributor:		Project:
Contractor:		Approved By:
Date:	Quantity:	Architect:
Scale: N/A	Pages: 1 of 2	Item #

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OF AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.

6/19/2025

## ROOF ACCESSORIES—DURA-HATCH EQUIPMENT SERIES—REH

### COMMON SIZES—REH

QTY	MODEL	MATERIAL	CURB OPENING	CLEAR OPENING	APPROX WT—lbs
	REHA-4848ST	Aluminum	48" x 48"	40" x 40"	140
	REHA-6060ST	Aluminum	60" x 60"	52" x 52"	195
	REHA-6096ST	Aluminum	60" x 96"	52" x 88"	260
	REHA-7272ST	Aluminum	72" x 72"	64" x 64"	240
	REHA-7296ST	Aluminum	72" x 96"	64" x 88"	375
	REHG-4848GT	Steel	48" x 48"	40" x 40"	320
	REHG-6060GT	Steel	60" x 60"	52" x 52"	410
	REHG-6096GT	Steel	60" x 96"	52" x 88"	550
	REHG-7272GT	Steel	72" x 72"	64" x 64"	500
	REHGA-7296ST	Steel Curb & Aluminum Cover	72" x 96"	64" x 88"	515

### MADE-TO-ORDER REH: EXAMPLE—REHG-4884GT-CD

#### REH


#### MATERIAL

- G** Galvanneal
- A** Aluminum
- GA** Steel Curb, Aluminum Cover

#### - WIDTH LENGTH

--	--	--

#### FINISH

- GT** Powder Coat Gray Texture (Std for REHG)
- ST** Powder Coat Silver Texture (Std for REHA, REHGA)

#### - OPTIONS


- CD** Double Wall Curb
- CM** Curb Mount
- Hxx** Optional Curb Height - Enter Size Below  
Specify Curb Height from 13" to 22"
- IS** 1" Fiberboard Insulated Curb
- IT** 2" Polyiso Insulated Curb
- IW** 1" x 6" Wood Nailer Top/Polyiso Bottom of Curb
- SS** Stainless Hardware (excluding zinc plated steel center operator)

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.